



Features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 2750 lm, 25 W, 110 lm/W, 6500 K, drive current 350 mA, MW On/Off with quick connector, CRI80, IP65, IK08, Class I, nominal average lifetime (h): 50000, 1278 mm x 84 mm x 75 mm, energy class: A++ A+ A, D-mark

Product Overview


Product name	START Waterproof Single 1200 IP65 MW 2800lm 865 QC
Technology	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	110
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	25
Electrical protection	Class I
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679815

START Waterproof Single 1200 IP65 MW 2800lm 865 QC 0067981

Warranty

5 years

Photometry

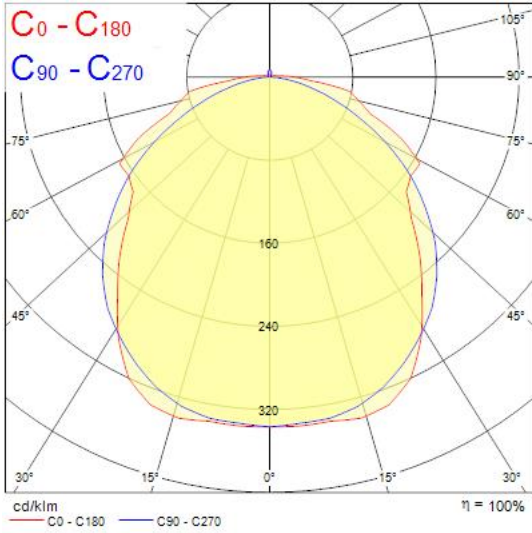

Technical drawings

