



Data Sheet | Item Number: 232-340

THT male header for double-deck assembly; 1.0 x 1.0 mm solder pin; angled; Pin spacing 5 mm; 10-pole; gray

<https://www.wago.com/232-340>

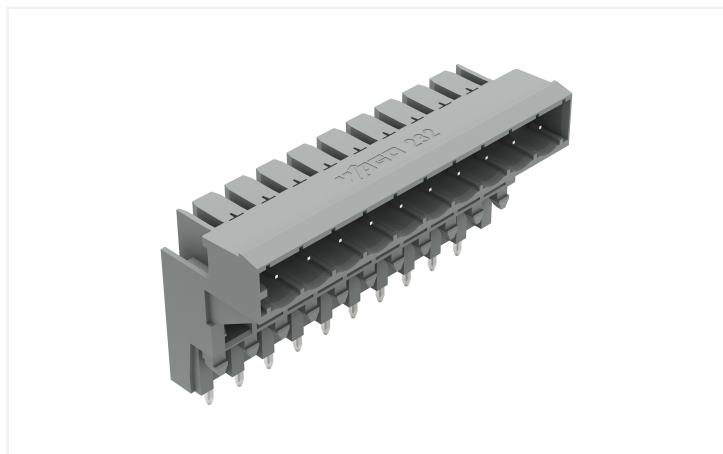

Color: ■ gray

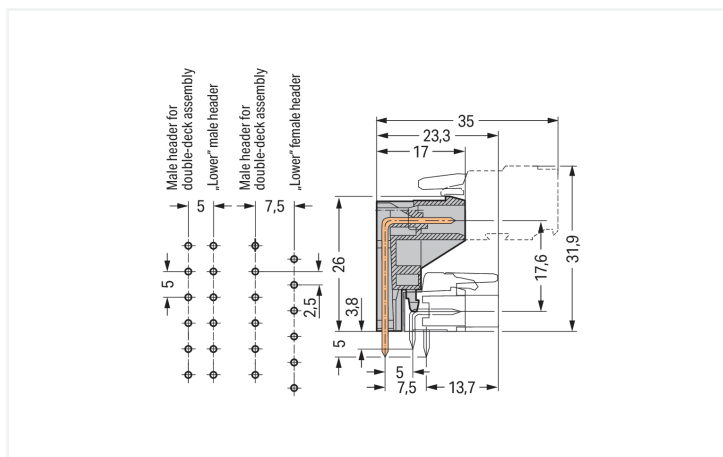


Dimensions in mm

Length = (pole no. - 1) x pin spacing + 8.2 mm
The solder pins of the "lower" male headers are in line. The solder pins of the "lower" female headers are staggered by half a pin spacing.

Male connector, 232 Series, solder pin dimensions 1 x 1 mm

Our male connector (item number 232-340) is designed for seamless electrical installations. The dimensions are (53.2 x 31 x 17) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THT soldering.

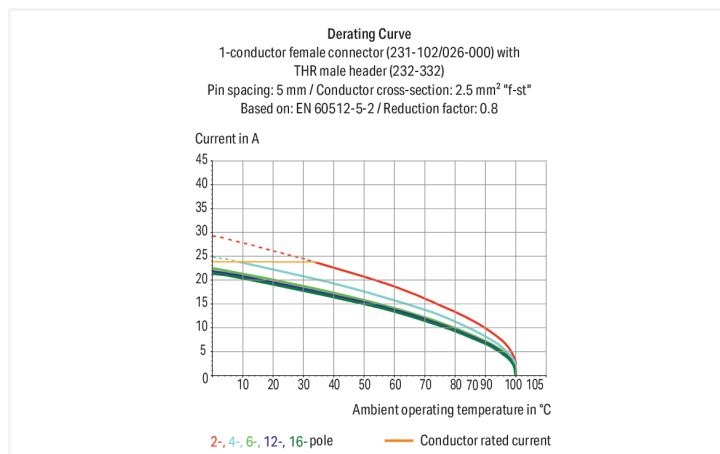



Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		320 V	320 V	630 V
Rated impulse withstand voltage		4 kV	4 kV	4 kV
Rated current		12 A	12 A	12 A
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		300 V	-	300 V
Rated current		10 A	-	10 A
Approvals per		UL 1977		
Rated voltage		600 V		
Rated current		10 A		
Approvals per		CSA		
Use group		B	C	D
Rated voltage		300 V	-	300 V
Rated current		10 A	-	10 A

Connection Data	
Total number of potentials	10
Number of connection types	1
Number of levels	1
Connection 1	
Pole number	10

Physical data	
Pin spacing	5 mm / 0.197 inches
Width	53.2 mm / 2.094 inches
Height	31 mm / 1.22 inches
Height from the surface	26 mm / 1.024 inches
Depth	17 mm / 0.669 inches
Solder pin length	5 mm
Solder pin dimensions	1 x 1 mm
!	1.4 (+0.1) mm

Mechanical data	
Variable coding	No
Anti-rotation protection	Yes



Plug-in connection		
Contact type (pluggable connector)		Male connector/plug
Connector (connection type)		for PCB
Mismating protection		No
Mating direction to the PCB		0°

PCB contact		
PCB contact		THT
Solder pin arrangement		over the entire male connector (in-line)
Number of solder pins per potential		1

Material data		
Note (material data)		Information on material specifications can be found here
Color		gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.157 MJ
Weight		8.6 g

Environmental requirements		
Limit temperature range		-60 ... +100 °C
Processing temperature		-35 ... +60 °C

Commercial data		
Product Group		3 (Multi Conn. System)
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		PL
GTIN		4044918685504
Customs tariff number		85366930000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-44-04-02
eCl@ss 9.0		27-44-04-02
ETIM 9.0		EC002637
ETIM 10.0		EC002637
ECCN		NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
   			  		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-113351	ABS American Bureau of Ship- ping	-	24-0095975-PDA
CSA DEKRA Certification B.V.	C22.2	1466354	DNV DNV GL SE	-	TAE000016Z
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-130478 REV.1	LR Lloyds Register	IEC 61984	96/20035 (E5)
UL Underwriters Laboratories Inc.	UL 1059	E45172			
UR Underwriters Laboratories Inc.	UL 1977	E45171			

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 232-340	

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 232-340	EPLAN Data Portal 232-340
	ZUKEN Portal 232-340



PCB Design	
Symbol and Footprint via SamacSys 232-340	
Symbol and Footprint via Ultra Librarian 232-340	

1 Compatible Products
1.1 System counterpart
1.1.1 Female connector/socket



Item No.: [231-110/026-000](#)

1-conductor female connector; CAGE CLAMP®; 2.5 mm²; Pin spacing 5 mm; 10-pole; gray

1.2 Optional Accessories
1.2.1 Coding
1.2.1.1 Coding



Item No.: [231-129](#)


Coding key; snap-on type; light gray



Item No.: [231-160](#)

Coding pin; for coding lower male headers; push-in type; light gray

Installation Notes
Coding



Coding a male header – fitting coding key (s).