


## Walraven RapidStrut® Slide Nut With Spring (hdg)

(H2426)

to connect construction parts to the rail

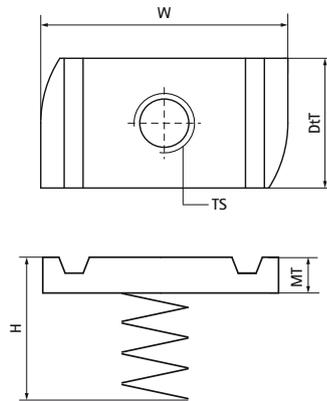

### Features & benefits

- material: slide nut made of steel 1.0332; spring made of spring steel DIN17223 (class A)
- hot dip galvanized
- M10 and higher are tested for fire safety
- Tested values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.
- More details can be found on the Technical Datasheet.

Product Number	For Rail Type	Thread Size	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
Reference letter		TS	MT	T <sub>inst.</sub>	F <sub>a,x</sub>	F <sub>a,z</sub>	W x H x DtT
Unit description			mm	Nm	N	N	mm x mm x mm
6518106	41x21	M6	5.00	7	950	2,660	34 x 18 x 19
6518108	41x21	M8	6.00	25	2,200	4,500	34 x 19 x 19
6518110	41x21	M10	8.00	40	2,550	5,000	34 x 21 x 19
6518112	41x21	M12	10.00	50	2,950	5,000	34 x 22 x 19
6518206	41x41	M6	5.00	7	950	2,660	34 x 38 x 19
6518208	41x41	M8	6.00	25	2,200	4,500	34 x 39 x 19
6518210	41x41	M10	8.00	40	2,550	5,000	34 x 41 x 19
6518212	41x41	M12	10.00	50	2,950	5,000	34 x 42 x 19