


## Walraven RapidStrut® Slide Nut (zp)

(H2420)

to connect construction parts to the rail

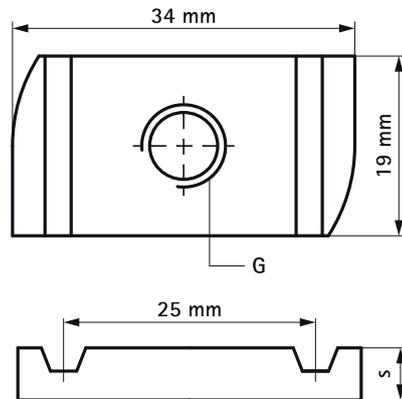

### Features & benefits

- material: steel 1.0332
- zinc plated
- M10 & M12 tested for fire safety according to EN 1366-1.
- Tested values in combination with BIS RapidStrut® Rail 41x41x2.5mm.

Product Number	For Rail Type	Thread Size	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
Reference letter		TS	MT	T <sub>inst.</sub>	F <sub>a,x</sub>	F <sub>a,z</sub>	W x H x D±T
Unit description			mm	Nm	N	N	mm x mm x mm
6517006	41x21, 41x41, 41x51, 41x62, 41x82	M6	5.00	7	950	2,660	34 x 5 x 19
6517008	41x21, 41x41, 41x51, 41x62, 41x82	M8	6.00	25	2,200	4,500	34 x 6 x 19
6517010	41x21, 41x41, 41x51, 41x62, 41x82	M10	9.00	40	2,550	5,000	34 x 8 x 19
6517012	41x21, 41x41, 41x51, 41x62, 41x82	M12	9.00	50	2,950	5,000	34 x 9 x 19