


Walraven RapidStrut® Slide Nut (BUP1000)

(H2415)

to connect construction parts to the rail

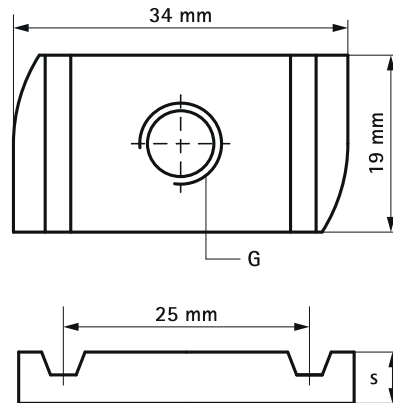

Features & benefits

- for all types of Walraven RapidStrut® Rail
- for tight fixing of accessories (e.g. connectors) on rail
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- M10 & M12 tested for fire safety according to EN 1366-1.
- Tested values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.

Product Number	For Rail Type	Thread Size	Material Thickness	Torque Moment For Installation	Maximum Al- lowed Load Fax	Maximum Al- lowed Load Faz	Total Width x Total Height x Total Depth
Reference letter		TS	MT	T inst.	Fa,x	Fa,z	W x H x DtT
Unit description			mm	Nm	N	N	mm x mm x mm
65188006	41x21, 41x41, 41x51, 41x62, 41x82	M6	5.00	7	950	2,660	34 x 5 x 19
65188008	41x21, 41x41, 41x51, 41x62, 41x82	M8	6.00	25	2,200	4,500	34 x 6 x 19
65188010	41x21, 41x41, 41x51, 41x62, 41x82	M10	9.00	40	2,550	5,000	34 x 8 x 19
65188012	41x21, 41x41, 41x51, 41x62, 41x82	M12	9.00	50	2,950	5,000	34 x 9 x 19