


## Walraven starQuick® Push Plug

(C0575)

for use with Walraven starQuick®

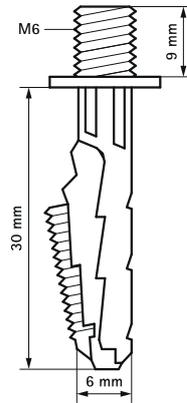

### Features & benefits

- for fixing of a Walraven starQuick® clamp or other clamp with thread connection M6
- pre-drill hole Ø 6 mm and insert plug
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

Product Number	Plug Length	Drill Hole Diameter Plugs	Min. Drill Hole Depth	Thread Size	Length Metrical Thread	Standard Embedment Depth	Total Width x Total Height x Total Length
<i>Reference letter</i>	<i>LP</i>	<i>d0</i>	<i>h0 min</i>	<i>TS</i>	<i>Lm</i>	<i>hnom</i>	<i>W x H x L</i>
<i>Unit description</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>		<i>mm</i>	<i>mm</i>	<i>mm x mm x mm</i>
6101063	30	6	30	M6	9	30	13 x 8 x 42