







28 450 845



- 3/8" shower outlet
- rosette 60 x 78 mm
- 1/2" connection
- WRAS

Intrinsic protection against back flow.

	Brushed Bronze (PVD)	28 450 845-42
	Chrome	28 450 845-00
	Brushed Platinum	28 450 845-06
	Dark Chrome	28 450 845-19
	Light Gold (PVD)	28 450 845-26
	Brushed Light Gold (PVD)	28 450 845-27
	Matte Black	28 450 845-33
	Brushed Chrome	28 450 845-93
	Brushed Dark Platinum	28 450 845-99


Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
- min. recess depth 90 mm
 - max. recess depth 163 mm




28 450 845

mm [inches]

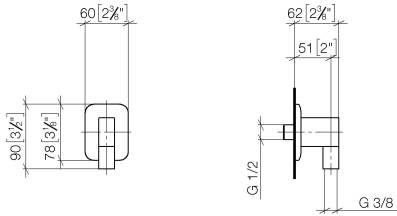

Flow rate chart

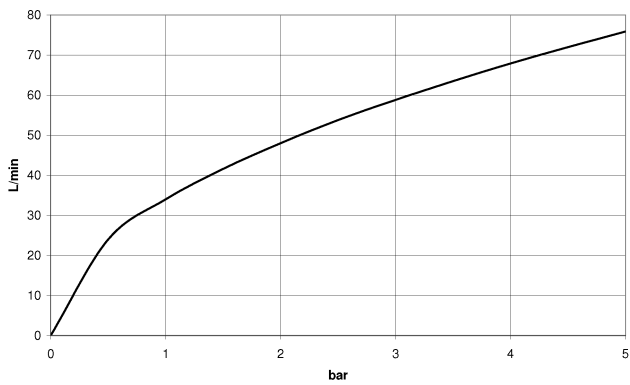

Codes & Standards

ASME A112.18.1

cUPC

Scottish Water
Byelaws

UK Water Supply
Regulations



LISSÉ Wall elbow - Brushed Bronze (PVD)

LISSÉ

28 450 845

Certificates and sustainability

WRAS_2310

IAPMO_4976

28 450 845

