

### Features

- START Waterproof Slim is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 7300 / 3800lm (selected by DIP switch), 52.5 / 26W, 139 / 146lm/W and 100,000 hours lifespan L70B50. SDCM < 5; IP66; IK08; Class II; 1540mm x 70mm x 73mm.


### Product Overview

Product name	START Waterproof Slim 1500 IP66 3800/7300lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357161
Fixture luminous flux (lm)	7300
Luminaire efficacy (lm/W)	139
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	52.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes with restrictions

## START Waterproof Slim 1500 IP66 3800/7300lm 840 0046427

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 7035 - Light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288464275
Warranty	5 years
Dimming method	Other

### Photometry

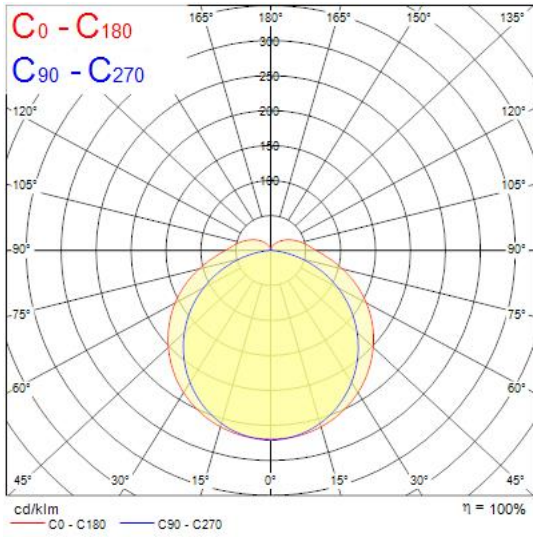

### Technical drawings

