



## Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 3000K, CRI80, Non-dimmable, 7300lm, 51W, 143lm/W, Symmetrical Wide beam, 100.000hrs L80B50 lifespan, 330 x 231 x 68mm (LxWxD) dimensions, 2.1kg weight, RAL9017 Traffic Black color.

## Product Overview


Cap/Base

N/A

Control gear type

LED driver constant current

## Photometry

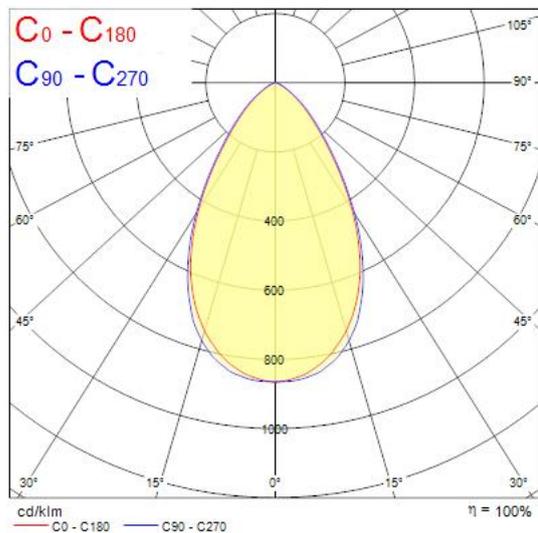

## Technical drawings

