


Walraven Toggle Plug (Stud-end)

(L1025)

fixing to hollow walls & ceilings

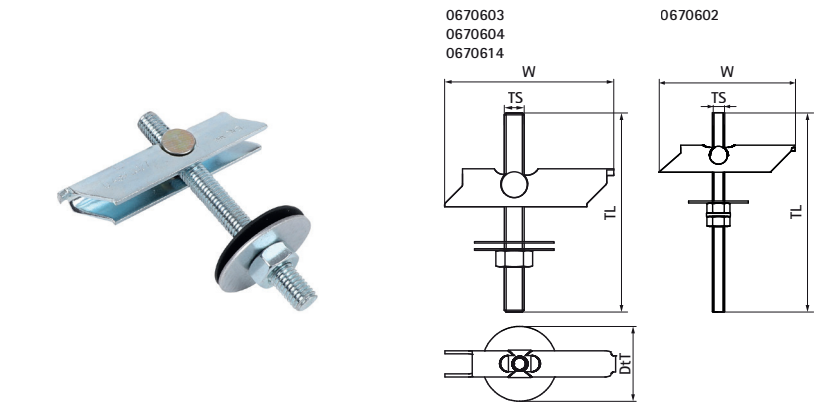

Features & benefits

- U-profile with rotating shaft with stud bolt
- for fixing in hollow walls and hollow ceilings or profiled roofing sheets
- with VdS-approval - certificate number G 4890027 (M10) max. DN 50 - 2"
- with FM-approval - certificate number 3047342 max. DN 40 - 1 1/2"
- load capacity of the plug is influenced by the surface
- material: metal parts made of steel; protective washer made of rubber (0670602 without rubber washer)
- zinc plated

Product Number	Thread Size	Thread Length	Drill Hole Diameter	Width Across Flats Min.	Hollow Depth	Maximum Substrate Thickness	Total Width x Total Height x Total Depth	Approvals
Reference letter	TS	TL	d0	WAF			W x H x DtT	
Unit description		mm	mm	mm	mm	mm	mm x mm x mm	
0670602	M6	100	17	10	70	55	70 x 102 x 30	ITB (KOT)
0670603	M8	100	20	13	75	50	74 x 102 x 40	ITB (KOT)
0670604	M10	100	25	17	85	45	85 x 102 x 40	VdS ITB (KOT) FM
0670614	M10	200	25	17	85	145	85 x 202 x 40	VdS FM