


PROLUMIA®

PRO-BAY MULTI INDUSTRIAL Highbay Luminaires

NEXT LEVEL Highbay Luminaire
That excels in price, performance
and usability

3-STEP
ADJUSTABLE CCT
& LUMINOUS FLUX
ZHAGA LIGHTING
CONTROLS

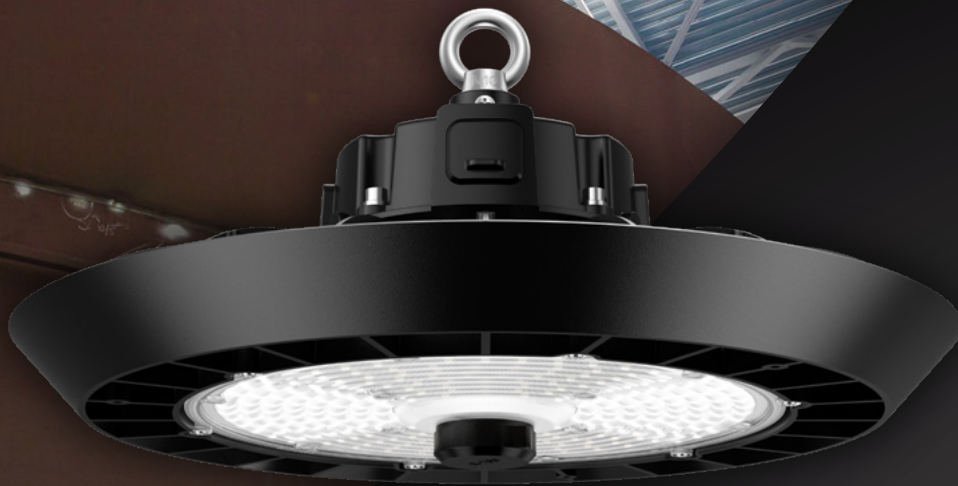

5 YEARS WARRANTY




PRO-BAY MULTI

INDUSTRIAL Highbay Luminaires

NEXT LEVEL Highbay Luminaire
That excels in price,
performance and usability

The Pro-Bay Multi is an outlier in many respects. Its exceptionally high luminous efficacy of up to 195 lm/W results in significant energy savings. In addition, 3 adjustable levels of brightness and a color temperature that can be set to 3000, 4000 or 5000 K maximize its usability. Finally, Pro-Bay Multi accessories, such as PIR or radar-controlled motion detectors, a twilight switch or Casambi module offer the benefits and comfort of an intelligent lighting solution literally in an instant.

MORE INFO ABOUT
PRO-BAY MULTI
ONLINE:



FEATURES & PROPERTIES


- Uniform, powerful, and energy-efficient illumination
- 115°, 85°, or 55° lens optics with aluminium or PC reflector options
- Three-step adjustable luminous flux, up to 195 lm/W efficiency
- Adjustable color temperature: 3000, 4000, or 5000 K
- Suitable for pendant or surface mounting (wall/ceiling)
- Zhaga Book 18 socket for communication units or controls
- PIR/radar motion detectors, twilight switch, and Casambi module available



GENERAL SPECIFICATIONS

Fixture type	Industrial highbay luminaire
Application	Ceiling / Wall
Installation options	Surface mounted, suspended
Installation environment	Indoor
Lighting function	General / Area lighting
Luminaire versions	Standard version
Electrical safety class	Class 1
AC-voltage & frequency	220-240 V AC 50-60 Hz
Type of driver	Constant current
Type of light source	LED (type SMD 2835)
Power consumption	max. 200 W
Luminous flux	max. 34,000 lm
Luminous flux adjustable	3 levels (100 / 80 / 60%)
Light color	3000 / 4000 / 5000 K
Light color adjustable	3 settings
Color Rendering Index	Ra >80
Optical system	Lens optic, optional PC/alu-reflector
Beam angle	55° / 85° / 115°
Ingress Protection (IP)	IP65
Impact resistance (IK)	IK08
Median useful life	L80 >100,000 hours
Ambient temperature (Ta-range)	-30°C to +50°C
Material	Die-cast aluminium / PC Diffuser
Color / finish	Black / matte
Certification	CE
Warranty period	5 years


APPLICATIONS

Factory halls, production areas, warehouses, logistics halls, hardware stores, megastores, stadiums and other sports facilities




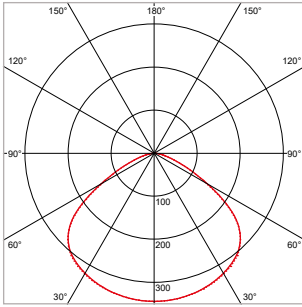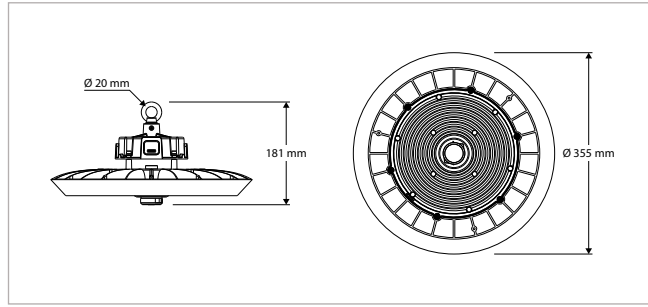

115°

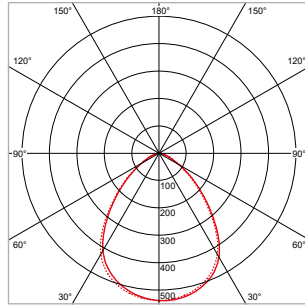

85°

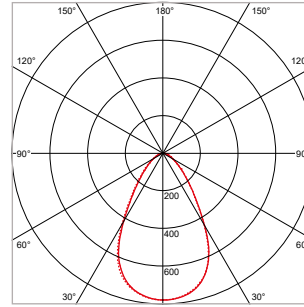

55°

PRO-BAY MULTI - HIGHBAY LUMINAIRE - IP65 - Ø 355 x H 181 mm - BLACK

VERSION	CCT	CRI	LIGHT OUTPUT *	POWER *	DRIVER	ART. NO.	AVAILABILITY
Standard 115°	3000 / 4000 / 5000 K	Ra >80	22,000 / 30,000 / 36,000 lm	113 / 155 / 193 W	On / Off	40643503	☺
Standard 85°	3000 / 4000 / 5000 K	Ra >80	22,000 / 30,000 / 36,000 lm	113 / 155 / 193 W	On / Off	40643504	☺
Standard 55°	3000 / 4000 / 5000 K	Ra >80	22,000 / 30,000 / 36,000 lm	113 / 155 / 193 W	On / Off	40643505	☺

*) Light output & power ratings apply to 4000 K CCT-setting.



PRO-BAY MULTI - ACCESSORIES | INSTALLATION / MOUNTING

DESCRIPTION	ART. NO.	AVAILABILITY
Surface mount bracket - 30° tiltable	40643510	☑
Suspension set - L 50 cm - chain-Ø 3 mm - incl. 2 x carabiner Ø 6 x 60 mm	40643520	☑



40643510



40643520

PRO-BAY MULTI - ACCESSORIES | REFLECTORS

DESCRIPTION	ART. NO.	AVAILABILITY
Reflector - aluminium - 90°	40643511	☑
Reflector - polycarbonate - 90°	40643512	☑



40643511



40643512



PRO-BAY MULTI - ACCESSORIES | SENSORS / LIGHTING CONTROLS

DESCRIPTION	ART. NO.	AVAILABILITY
MW motion / daylight sensor - Zhaga Book 18 connector	40643515	☑
PIR motion / daylight sensor - Zhaga Book 18 connector	40643516	☑
Photocell sensor - Zhaga Book 18 connector	40643517	☑
Remote control for programming sensors # 40643515, 40643516, 40643517	40643519	☑



40643515



40643516



40643517



40643519

PRO-BAY MULTI - ACCESSORIES | CASAMBI SMART NODE

DESCRIPTION	ART. NO.	AVAILABILITY
Casambi Bluetooth node - Zhaga Book 18 connector	40643518	☑



40643518



Zhaga connector



PROLUMIA®

PROLUMIA NL

Riga 10
2993 LW BARENDRECHT
T +31 (0)180 64 54 00
E info@prolumia.nl

PROLUMIA BE

Saffierstraat 5 - Unit 10A
2200 HERENTALS
T +32 (0)14 25 07 70
E info@prolumia.be

PROLUMIA CZ

Ke Slivenci 48
154 00 PRAHA 5 - LOCHKOV
T +420 222 563 003
E info@prolumia.cz

PROLUMIA DE

Feldbergstraße 57
61440 OBERURSEL
T +49 6171 8989 594
E info@prolumia.de

Brand of Nedelko Group

**MORE INFO ABOUT
PRO-BAY MULTI
ONLINE:**



Version: 1.0 - 2025-02

Nedelko B.V. pays the utmost attention to its catalog and reliability and actuality of the information contained therein. Despite all care, inaccuracies and omissions can not always be prevented. Nedelko B.V. is not liable for errors or inaccuracies. For the most current information please contact our sales department.