



Data Sheet | Item Number: 894-8992/233-306

pre-assembled connecting cable; Eca; Plug/open-ended; 2-pole; Cod. E; J-Y(ST)
Y..LG 2x2x0.8; 3 m; green

<https://www.wago.com/894-8992/233-306>

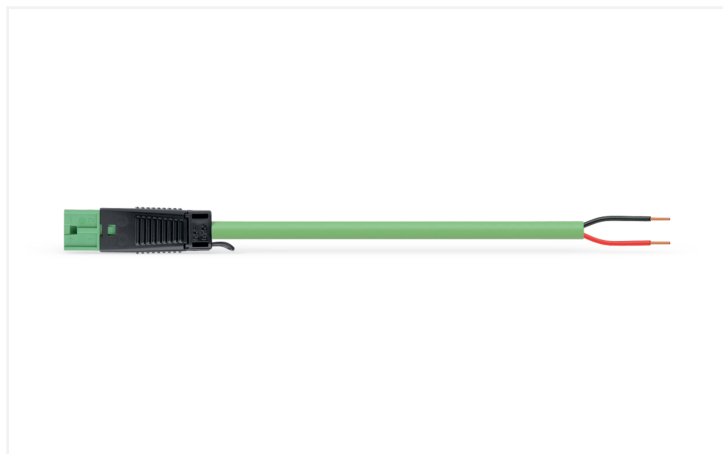

Color: ■ green

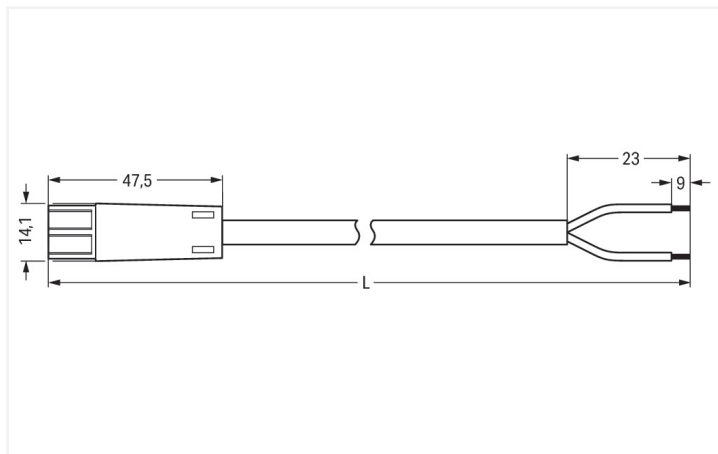

Dimensions in mm

Cable assembly WINSTA® KNX with strain relief

The WINSTA® KNX cable assembly E coding supports fast, reliable installation. Our pluggable installation connectors with spring pressure connection technology function without screw connections. They allow flexible, error-free installation in numerous possible uses. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). The KNX standard is the ultimate benchmark in building automation. It guarantees error-free, manufacturer-independent networking of advanced building systems. The standardised WINSTA® KNX pluggable installation connectors in green are employed for signal transfer in KNX networks. According to the European CPR, the fire class of the cables used for construction is decisive for building safety as well. For buildings with medium-level safety requirements, cable assemblies with fire class E are suitable.

Fast, error-free assembly thanks to cable assemblies from WAGO

A plug and a free end are available. WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It ensures fast, secure and, above all, error-free installation of components and cables. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with fire class E from WAGO.

- products perfectly tailored to your requirements guarantee safe use
- for emergency power supply
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

Notes

Note Cables with a different fire class can be found in the eShop.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	50 V	-	-
Rated impulse withstand voltage	0.8 kV	-	-
Rated current	3 A	-	-

General information

Note on contact resistance Approx. 3 mΩ contact resistance

Connection Data

Total number of potentials	2	Connection 1	
Conductor preparation	stripped	Conductor diameter	0.8 mm
		Strip length	9 mm / 0.35 inches
		Pole number	2
		Strip length (outer insulation)	23 mm
		Connection type	Plug - free end

Physical data

Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Total length	3 m

Mechanical data

Technology	KNX
Coding	E
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Plug - free end
Type of pre-assembled cable	Connecting cable
Cable type	UNITRONIC BUS EIB 2x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data

Note (material data)	Information on material specifications can be found here
Color	green
Insulation material (main housing)	Polyamide (PA66)
Fire class per EN 50575	E _{ca}
Contact material	Copper alloy; surface-treated
Contact Plating	Tin
Fire load	90.051 MJ
Connector color	green
Strain relief color	black
Sheathed cable color	green
Printing color of sheathed cable	black
Halogen-free	No
Silicon-free	Yes
Sheath material	PVC
Rubber cable	No

Material data

Weight	167.5 g
Copper weight of the raw cable	0.025 kg/m

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143306935
Customs tariff number	85444290900

Product Classification

UNSPSC	26121629
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 10.0	EC002587
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance



Compliance Search

Environmental Product
Compliance
894-8992/233-306



Documentation

Bid Text

894-8992/233-306	08.01.2015	doc 25.00 KB	
894-8992/233-306	19.02.2019	xml 2.97 KB	

CAD/CAE-Data

CAE data

WSCAD Universe
894-8992/233-306

