

## GLOBAL TRAC PRO L FEED OUT WHITE XTS35-3



### Features

- Global Trac Pro accessory - white, glass fibre reinforced polycarbonate L-feed that is applicable for three-circuit track systems where the polarity ridge is in the outer side. Dimensions - 99 x 99 x 33 mm (L x W x H).




### Product Overview

Product name	GLOBAL TRAC PRO L FEED OUT WHITE
Technology	Accessory
Housing	PC Polycarbonate
E-number SE	7402230
Light colour	N/A
Housing colour	RAL 9010 - Pure white
IP rating	IP20
IK rating	IK02
Product EAN number	6410014507350
Warranty	5 years

## GLOBAL TRAC PRO L FEED OUT WHITE XTS35-3

### Technical drawings

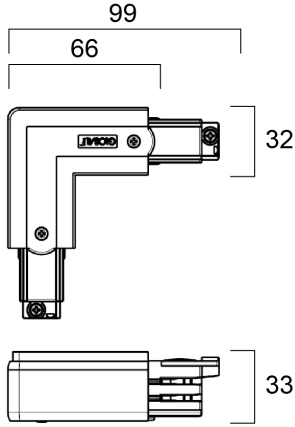

### Data table

#### GENERAL DATA

Product name	GLOBAL TRAC PRO L FEED OUT WHITE
Technology	Accessory
Housing	PC Polycarbonate
Operating temperature range (°C)	0°C...+25°C
E-number SE	7402230
Warranty	5 years

#### OPTICAL DATA

Light colour	N/A
--------------	-----

#### ELECTRICAL DATA

Control gear required	No
-----------------------	----

#### PHYSICAL DATA

## GLOBAL TRAC PRO L FEED OUT WHITE XTS35-3

Housing colour	RAL 9010 - Pure white
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	99
Nominal Product Width (mm)	99
Weight (kg)	0.097

### PACKAGING

Single packaging type	Plastic
Product EAN number	6410014507350
Packaging single width (cm)	23.3
Packaging single depth (cm)	3.2
DUN14 (outer)	06410014507350
Packaging outer length / height (cm)	19.3

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No