



## Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 3000K, CRI80, Non-dimmable, 27000lm, 198W, 136lm/W, Asymmetrical Wide beam, 100.000hrs L80B50 lifespan, 450 x 335 x 75mm (LxWxD) dimensions, 5kg weight, RAL9017 Traffic Black color.

## Product Overview


Cap/Base

N/A

Control gear type

LED driver constant current

## Photometry

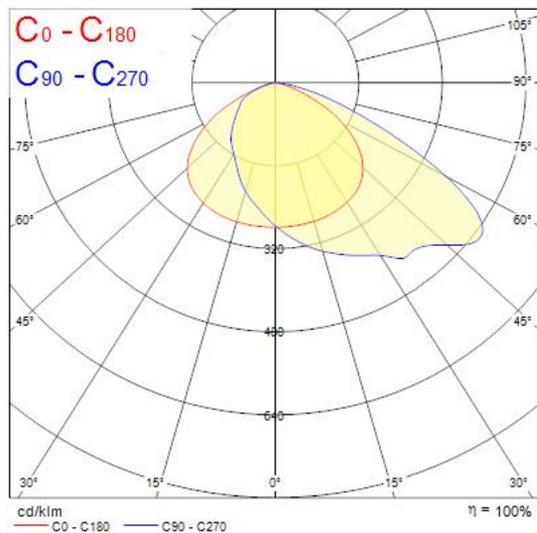

## Technical drawings

