

GLOBAL TRAC PRO T OUT-R WHITE XTS36-3



Features


- Global Trac Pro accessory - white, glass fibre reinforced polycarbonate T-feed that is applicable for three-circuit track systems where the polarity ridge is in the outer side and on the right. Dimensions - 166 x 99 x 33 mm (L x W x H).

Product Overview

Product name	GLOBAL TRAC PRO T OUT-R WHITE
Technology	Accessory
Housing	PC Polycarbonate
E-number SE	7402232
Light colour	N/A
Housing colour	RAL 9010 - Pure white
IP rating	IP20
IK rating	IK02
Product EAN number	6410014507367
Warranty	5 years

GLOBAL TRAC PRO T OUT-R WHITE XTS36-3

Technical drawings

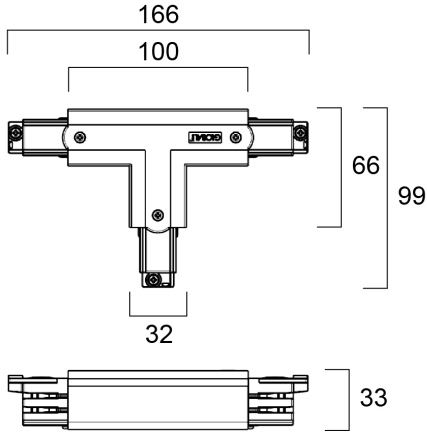

Data table

GENERAL DATA

Product name	GLOBAL TRAC PRO T OUT-R WHITE
Technology	Accessory
Housing	PC Polycarbonate
Operating temperature range (°C)	0°C...+25°C
E-number SE	7402232
Warranty	5 years

OPTICAL DATA

Light colour	N/A
--------------	-----

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

GLOBAL TRAC PRO T OUT-R WHITE XTS36-3

Housing colour	RAL 9010 - Pure white
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	166
Nominal Product Width (mm)	99
Weight (kg)	0.148

PACKAGING

Single packaging type	Plastic
Product EAN number	6410014507367
Packaging single width (cm)	24.6
Packaging single depth (cm)	3.3
DUN14 (outer)	06410014507367
Packaging outer length / height (cm)	18.6

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No