
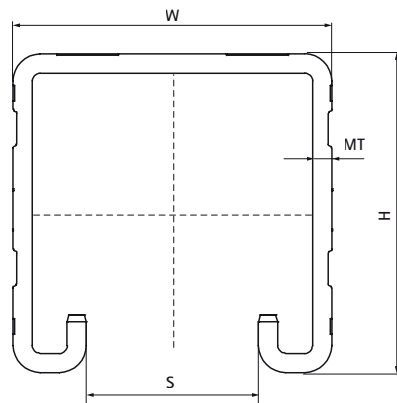


Walraven RapidStrut® channel (pg)

(H0410)

for medium weight fixing applications

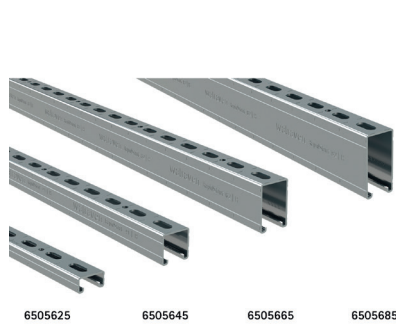

Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

EPD

Product Number	Type	Total Width x Total Height x Total Length	Material Thickness	Profile Opening
Reference letter		W x H x L	MT	S
Unit description		mm x mm x mm	mm	mm
6505224054	21 L	41 x 21 x 540	1.50	22
6505224	21 L	41 x 21 x 2,000	1.50	22
6505324	21 L	41 x 21 x 3,000	1.50	22
6505624	21 L	41 x 21 x 6,000	1.50	22
6505222	21 M	41 x 21 x 2,000	2.00	22
6505322	21 M	41 x 21 x 3,000	2.00	22
6505622	21 M	41 x 21 x 6,000	2.00	22
6505225	21 H	41 x 21 x 2,000	2.50	22
6505325	21 H	41 x 21 x 3,000	2.50	22
6505625	21 H	41 x 21 x 6,000	2.50	22
6505244	41 L	41 x 41 x 2,000	1.50	22
6505344	41 L	41 x 41 x 3,000	1.50	22
6505644	41 L	41 x 41 x 6,000	1.50	22
6505242	41 M	41 x 41 x 2,000	2.00	22
6505342	41 M	41 x 41 x 3,000	2.00	22
6505642	41 M	41 x 41 x 6,000	2.00	22
6505245	41 H	41 x 41 x 2,000	2.50	22
6505345	41 H	41 x 41 x 3,000	2.50	22
6505645	41 H	41 x 41 x 6,000	2.50	22
6505365	62 H	41 x 62 x 3,000	2.50	22
6505665	62 H	41 x 62 x 6,000	2.50	22
6505385	82 H	41 x 82 x 3,000	2.50	22
6505685	82 H	41 x 82 x 6,000	2.50	22