
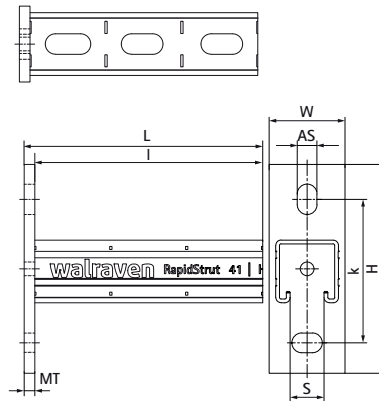


Walraven RapidStrut® Cantilever Arm (BUP1000)

(H0806)

fixing to wall, floor or ceiling



Features & benefits

- base plate with welded RapidStrut® Profile
- for quick and adjustable fixing of one or multiple pipes
- CO2 welded
- with continuous perforation
- with sawing marks each 50 mm on all 3 sides of the profile
- well balanced relation between base plate and profile for optimal use of load performance
- material: profiles made of steel 1.0038 (S235JR)
- material: base plate type 21 H made of steel 1.0044 (S275JR)
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Walraven RapidStrut® type 41 H and above tested for fire safety according to EN 1366-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	Type	Length	Total Width x Total Height x Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>W x H x L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		(mm)	(mm) x (mm) x (mm)	(mm)	(mm)	(mm)	(mm)
66082120	21 H	205	50 x 110 x 205	5	18x11	22	70
66082130	21 H	300	50 x 110 x 305	5	18x11	22	70
66082145	21 H	450	50 x 110 x 455	5	18x11	22	70
66082160	21 H	600	50 x 110 x 605	5	18x11	22	70
66084030	41 M	300	50 x 137.50 x 307	7	20x13	22	95
66084045	41 M	450	50 x 137.50 x 457	7	20x13	22	95
66084060	41 M	600	50 x 137.50 x 607	7	20x13	22	95
66084115	41 H	150	50 x 137.50 x 157	7	20x13	22	95
66084120	41 H	200	50 x 137.50 x 207	7	20x13	22	95
66084130	41 H	300	50 x 137.50 x 307	7	20x13	22	95
66084140	41 H	400	50 x 137.50 x 407	7	20x13	22	95
66084145	41 H	450	50 x 137.50 x 457	7	20x13	22	95
66084150	41 H	500	50 x 137.50 x 507	7	20x13	22	95
66084160	41 H	600	50 x 137.50 x 607	7	20x13	22	95
66084175	41 H	750	50 x 137.50 x 757	7	20x13	22	95
66084198	41 H	1000	50 x 137.50 x 1007	7	20x13	22	95
66084199	41 H	1200	50 x 137.50 x 1207	7	20x13	22	95