


Walraven RapidRail® Stainless Steel Cantilever Arm

(M2505)

fixing to wall or ceiling

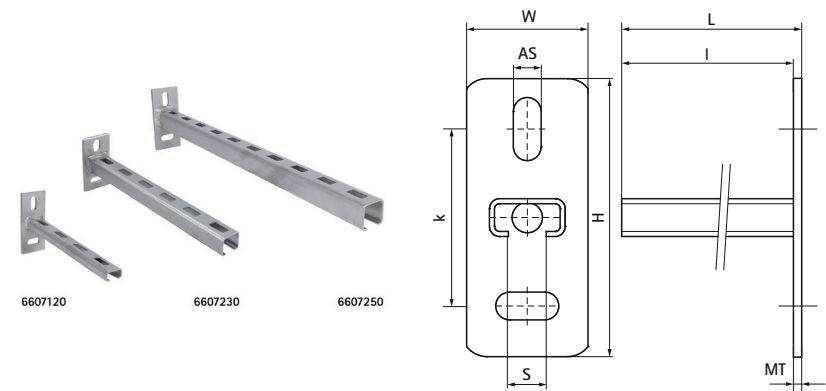

Features & benefits

- wall plate with welded C-profile
- slots at 90° to each other to simplify fixing
- C02 welded
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'
- Tested values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.



Product Number	Type	Length	Total Width x Total Height x Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>W x H x L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		(mm)	(mm) x (mm) x (mm)	(mm)	(mm)	(mm)	(mm)
6607120	30x15	200	48 x 110 x 200	5	25x11	15	70
6607230	30x30	300	48 x 110 x 300	5	25x11	15	70
6607250	30x30	500	48 x 110 x 500	5	25x11	15	70