


Walraven Threaded Rod Support

(E0560)

for diagonal ties 45 deg

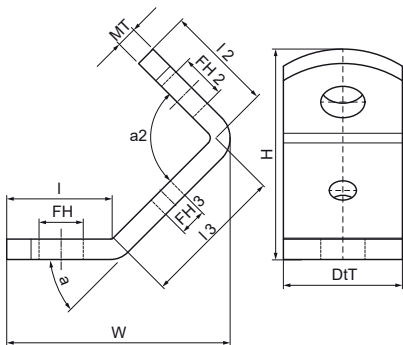

Features & benefits

- for strengthening rail constructions with the aid of threaded rods
- also suitable for bracing cantilever arms
- material: steel 1.0332
- zinc plated
- max. allowed load (Fa,z) under an angle of 45°

| Product Number   | Length | Length 2 | Length 3 | Material Thickness | Fixing Hole | Fixing Hole 2 | Fixing Hole 3 | Angle | Angle 2 | Total Height | Total Width | Total Depth | Maximum Allowed Load Faz |
|------------------|--------|----------|----------|--------------------|-------------|---------------|---------------|-------|---------|--------------|-------------|-------------|--------------------------|
| Reference Letter | L      | L 2      | L 3      | MT                 | FH          | FH 2          | FH 3          | a     | a 2     | H            | W           | DtT         | Fa,z                     |
| Unit description | mm     | mm       | mm       | mm                 | mm          | mm            | mm            | °     | °       | mm           | mm          | mm          | N                        |
| 6698013          | 31     | 31       | 42       | 6.00               | 13          | 13            | 8             | 45    | 90      | 63           | 74          | 35          | 3,000                    |