


Walraven Swivel Beam Clamp Model P


(K2030)

for clamping on beam flange

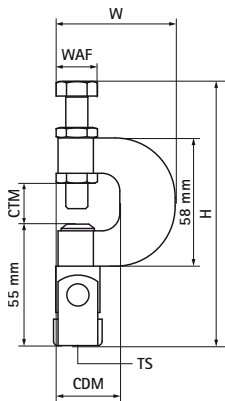

Features & benefits

- multidirectional clamp
- for suspension on pitched flanges without welding or drilling
- up to flange thickness 17 mm
- according to VdS-regulations an additional safety strap should be used when supporting pipes above DN65
- articulation to 45° sideways, 90° forwards
- safety strap is obliged with VdS applications 1 and 4
- material: steel
- zinc plated
- with VdS-approval - certificate number G 4020003



Product Number	Maximum Clamping Thickness	Maximum Clamping Depth	Total Width x Total Height x Total Depth	Thread Size	Width Across Flats	Maximum Allowed Load Faz	Approvals
Reference letter	CTM	CDM	W x H x DtT	TS	WAF	Fa,z	
Unit description	mm	mm	mm x mm x mm		mm	N	
6078010	17	27	53 x 168 x 28	M10	17	2,500	FM VdS