



# ExII-Telephone ExResistTel

## Explosion-proof, weatherproof Industrial telephone

- ▶ Handsfree
- ▶ Temperature range  
-25°C to +60°C
- ▶ Certified for dust and gas atmospheres
- ▶ Display
- ▶ IP 66 EN 60529
- ▶ different housing colours

### Application

Communication devices for use in hazardous areas in the industry have to be especially well adapted to the extreme operating conditions they will be exposed to.

Our new Ex-telephone has been developed for operation in the petrochemical industry, on off-shore plants, in mills and harbours, which means it is resistant to large temperature differences, air humidity, sea water, dust and strong mechanical wear and tear. It is certified for use in hazardous dust and gas atmospheres.

The ExResistTel is completely programmable, and has been equipped with a 21-piece stainless (V4A) steel keypad designed for use with gloves.

Letters and figures are presented clearly on the alphanumeric display. The ExResistTel also boasts all the convenient features that have become standard in the field of office communication.

A string of optional extras and components – especially certified for hazardous areas – makes our telephone even more functional.

Our ExResistTel is the correct decision for a safe connection – convenient and reliable in hazardous areas.

### Telephoning in the off-shore

The housing is made of impact-resistant and shockproof glass-fibre-reinforced polyester and is resistant to acids, sea water, alkalis, moisture and grease.



# Technical specifications

## Connections

Types of protection	II 2 G EEx em[ib] IIC T5 II 2 D IP66 T100°C -25°C ≤ T <sub>a</sub> ≤ 60°C	II 2 G EEx em[ib] IIC T6 II 2 D IP66 T80°C -25°C ≤ T <sub>a</sub> ≤ 40°C
Approval	DMT 02 ATEX E 183	
Line voltage	24 V <sub>DC</sub> to 66 V <sub>DC</sub>	
Line current	15 mA <sub>DC</sub> to 100 mA <sub>DC</sub>	
Ringing alternating current	24 V <sub>AC</sub> to 90 V <sub>AC</sub> (at 21...54 Hz ringing frequency) 30 V <sub>AC</sub> to 90 V <sub>AC</sub> (at 16,6...54 Hz ringing frequency)	
Ringing impedance	Greater than 6,0 KΩ at 25 Hz and 24...90 V <sub>AC</sub> . Greater than 4,0 KΩ at 50 Hz and 24...90 V <sub>AC</sub> .	
Inquiry key	Flash function adjustable from 40ms to 399ms	
Dialling procedure	PD-DTMF operation to be set in the menu. DTMF operation according to the CCITT recommendation Q.23. PD operation where the pulse/pause ratio can be set to 1.5:1 or 2:1 in the menu.	
W-conductor	Connection for external secondary sounder.	
Screw terminals	Up to 4 mm <sup>2</sup> rigid. Up to 2.5 mm <sup>2</sup> flexible.	

## Housing

Material	Glass-fibre-reinforced polyester
Height x Width x Depth	Approx. 266 mm x 227 mm x 135 mm
Weight	Approx. 5.5 kg
Display	2-line alphanumerical display with pictograms. Visible area approx. 78 mm x 26 mm.
Keypad	Metal keypad with ice protection. 21 keys with ABC lettering for name entries.

## Receiver




Stabilizer bracket	Integrated, adjustable stabilizer bracket.
Handset cord	Stainless steel (V4A) armoured handset cord.
Receiver inset	Dynamic receiver inset with leakage field spool for inductive coupling of hearing aids.
Mouthpiece	Electret-foil microphone
Noise suppression	Greater than 3dB due to integrated mouthpiece horn mouth.

## Environmental conditions

Degree of protection:	IP 66 according to EN60529
Impact protection:	IK 09 according to EN50102
Operation temperature:	-25°C to +60°C for temperature class T5 -25°C to +40°C for temperature class T6
Storage temperature:	-25°C to +70°C

## Further characteristics

Optical call signalling	Display shows ( ( ( 🔔 ) ) ) )
Ringing sound pressure level	Approx. 90 dB(A) at 1m distance
Ringing melodies	10 melodies selectable
Listening by loudspeaker	Maximum sound pressure level approx. 68 dB (A) at 1m distance.
Handsfree operation	Maximum sound pressure level approx. 68 dB (A) at 1m distance.
Amplified listening in receiver	Receiver volume can be boosted in 7 steps from 0–12 dB(A).
Menu	In several language
Telephone directory	Max. 50 entries (names and numbers)

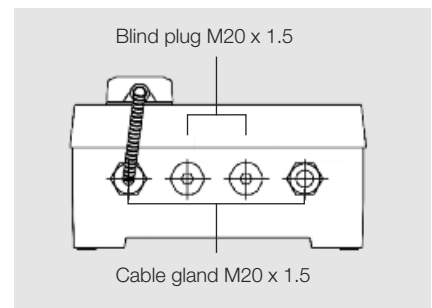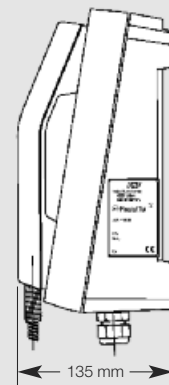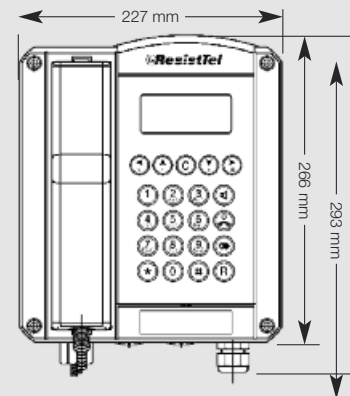

\* The full article number is made up by appending the colour code for the coloured cap to the article number given below.

transp.	01
red	02
yellow	03
green	04
blue	05

# Order information

Type	Name	Version	Article no.	Type	Name	Version	Article no.
ExResistTel	ExII-Telephone	black	112 861 01	Accessories	ExII-Additional headset		112 861 04
ExResistTel	ExII-Telephone	red	112 861 0102	Accessories	ExII-Loudspeaker set		112 861 05
ExResistTel	ExII-Telephone ZB	black	without keypad and display 112 861 02	Accessories	ExII-Secondary sounder		211 842 06
ExResistTel	ExII-Telephone ZB	red	without keypad and display 112 861 0202	Accessories	Protection hood	hot galvanized	118 901 01
ExResistTel	ExII-Telephone	Protection class I	112 862 01	Accessories	Protection hood	stainless steel	118 901 11
Accessories	ExII-Additional earpiece		112 861 03	Accessories	ExII-TWIN		118 833 ..*

Subject to change without notice · Stand 08/10



FHF Funke + Huster Fernsig GmbH · P.O. Box 14 01 66 · D-45441 Mülheim an der Ruhr · Gewerbeallee 15-19 · D-45478 Mülheim an der Ruhr  
Telephone +49-208-82 68-0 · Fax +49-208-82 68-286 · http://www.fhf.de · e-mail: info@fhf.de