

Weatherproof Telephone FernTel W

Built in Telephone for use in rugged conditions

- ▶ Analogue phone for indoor and outdoor use
- ▶ Use as an information and emergency call phone
- ▶ With or without keypad
- ▶ Illuminated keypad
- ▶ Protection degree IP 65
- ▶ Different handset colours on request

Application

The built-in telephone FernTel W leaves itself easily in tables and desks, as for example control rooms or alarm-head-quarters.

Without addition-expenditure also a vertical-montage is possible. The built-in telephone FernTel W is through its standard complete-production universally employable. The phone function at all telephone-branch with analogous interface.

INFO TELEPHONE

FernTel W the ideal phone for different kind of use.




Technical specifications

Anschlussdaten

Supply voltage	24...66 Vdc
Supply current	19...60 mA
Ringing alternating current	30...9 Vac
Ringing frequency	16...64 Hz
Mounting plate	stainless steel
Keypad	illuminated or not
Handset rest	Aluminium or plastic
Handset cord	armoured cord or spiral cord
Handset-Housing	Polycarbonate
Handset colours	standard grey (other colours on request)
Volume	80 dB(A)
Volume handset	can be boosted in 7 steps up to 12 dB(A)
Quickdialling	10 callnumbers are stored
Position of operation	mounted upright on the wall
Dimensions	see drawing
Receiver and transmitter capsule	electrodynamic capsules
Connection terminals	up to 1.5 mm ²
Operation temperature	-25°C...60°C
Protection degree	IP65 (IEC 60529)

Sample drawing

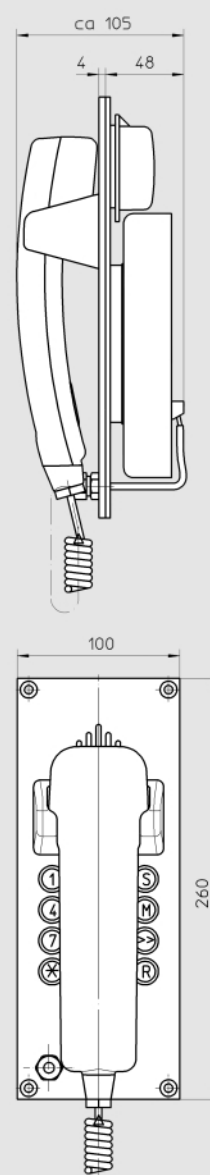

Order information

Type	Name	Version	Art. no.
FernTel W	weatherproof phone	without keypad with junction box with steel armoured handset cord	handset red 112 644 01
FernTel W	weatherproof phone	without keypad without junction box with spiral cord	handset orange 112 644 02
FernTel W	weatherproof phone	with illuminated keypad with spiral cord	handset grey 112 644 03
FernTel W	weatherproof phone	with illuminated keypad with steel armoured handset cord	handset grey 112 644 04
Accessories			
Housing for surface mounting		for FernTel W with steel armoured cord	118 900 060
Housing for surface mounting		for FernTel W with spiral cord	118 900 07

Subject to change without notice · Printout 1/08