

Obico 68


OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME

0005365



Product features

- Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°) brushed chrome bezel colour, 3 CCT options of 2700-3000-4000k, lumen up to 550lm, 5.4W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 37mm recessed depth, IP65 frontal degree, IK07, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Air-proof, to limit air leakage when used in residential applications within the building's thermal envelope. Directly coverable with insulation material according to EN60598-1

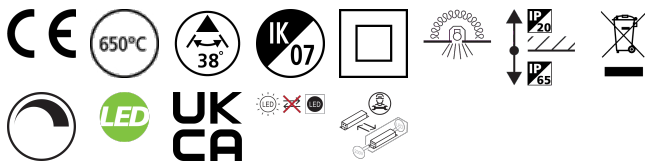

PRODUCT OVERVIEW







Product name	OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278507
Warranty	5 years
Useful luminous flux (Fuse)	530
Fixture luminous flux (lm)	530
Luminaire efficacy (lm/W)	98
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	5.4
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Housing colour	Chrome
IP rating	IP65/20
IK rating	IK07
Product EAN number	5410288053653

PHOTOMETRY

Obico 68

OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME

0005365

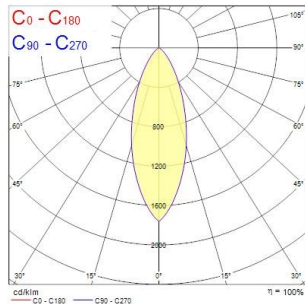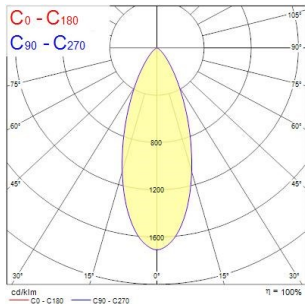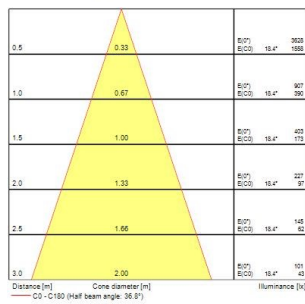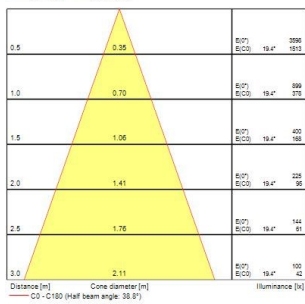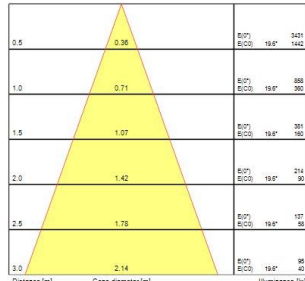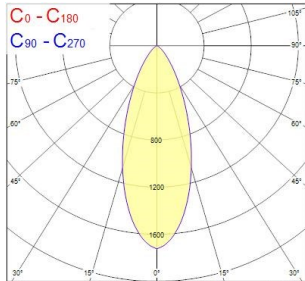

TECHNICAL DRAWINGS

