


Walraven RapidStrut® Rail Connector 90° G2 (BUP1000)

(H2804)

to make Strut rail fabrications

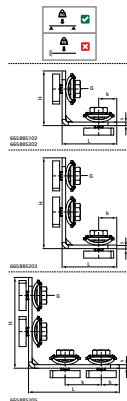

Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Product Number	For Rail Type	Angle	Total Width x Total Height x Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference letter		a	W x H x L	MT	w	FH	k	T _{inst.}	F _{a,z}	F _{a,x}
Unit description		°	mm x mm x mm	mm	mm	mm	mm	Nm	N	N
665885102	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 72.75 x 52.75	4.00	40	13.8	41	40	4,000	2,270
665885202	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 72.75 x 72.75	4.00	40	13.8	41	40	4,000	2,270
665885203	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 113.75 x 72.75	4.00	40	13.8	41	40	4,000	2,270
665885205	41x21, 41x41, 41x51, 41x62, 41x82	90	40 x 113.75 x 113.75	4.00	40	13.8	41	40	4,500	4,700