

### Features

- OPTICLIP TERRA 600 840 SSA01D WH is a high efficacy low glare ceiling recessed luminaire with replaceable light engines for office and education applications. Housing made of white colour cardboard, combined with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x40mm, IP20 (from the front), IK02, DALI D4I driver (Sylsmart enabled Bluetooth driver), low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3300lm luminous flux, 26W power consumption, 126lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 2000 cd/m<sup>2</sup>, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 650°C.


### Product Overview

<b>Product name</b>	OPTICLIP TERRA 600 840 SSA01D WH
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Other
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4279555
<b>Fixture luminous flux (lm)</b>	3300
<b>Luminaire efficacy (lm/W)</b>	126
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80

## OPTICLIP TERRA 600 840 SSA01D WH 0041956

Colour Variation Initial (SDCM)	3
Beam Angle (°)	80
Glare control	< 17
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5410288419565
Warranty	5 years
Dimming method	SylSmart SSA

### Photometry

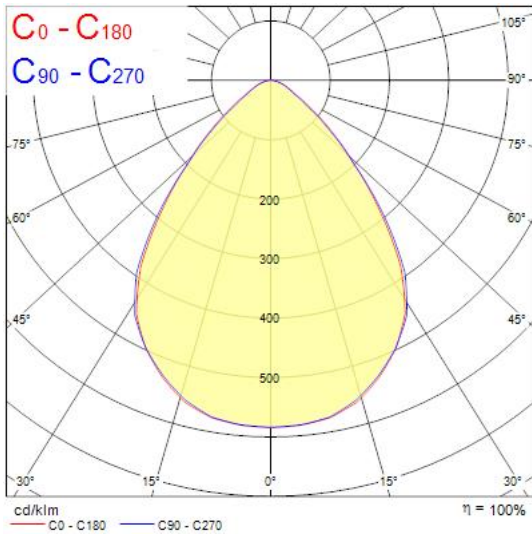

### Technical drawings

