


Walraven RapidStrut® Connector, Hinged (BUP1000)

(H2840)

for flexible angle connections

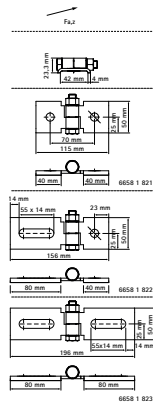

Features & benefits

- to make fabrication with Walraven RapidStrut® Rail
- fully adjustable
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Product Number	For Rail Type	Total Width x Total Height x Total Length	Material Thickness	Width	Fixing Hole	Fixing Slot	Maximum Allowed Load $F_{a,z}$
<i>Reference letter</i>		<i>W x H x L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>FS</i>	<i>F_{a,z}</i>
<i>Unit description</i>		<i>mm x mm x mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>N</i>
66581821	41x21, 41x41, 41x51, 41x62, 41x82	62.5 x 24.1 x 115.4	4.00	42	13		1,000
66581822	41x21, 41x41, 41x51, 41x62, 41x82	62.5 x 24.1 x 155.9	4.00	42	13	45x14	1,000
66581823	41x21, 41x41, 41x51, 41x62, 41x82	62.5 x 24.1 x 196.4	4.00	42		45x14	1,000