

Isoline DALI

ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK DA
0042557



Product features

- Isoline LED linear luminaire for industrial and commercial applications. 3380mm length with 1.7m blank section, with wide optics provide homogenous light distribution for aisles and focus areas. Suitable for DALI Dimming. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 56W power consumption, 8800lm luminous flux, 157 lm/W efficacy, 3380 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.




PRODUCT OVERVIEW

Product name	ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK DA
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Useful luminous flux (Fuse)	8800
Fixture luminous flux (lm)	8800
Luminous flux (lm)	8800
Luminaire efficacy (lm/W)	157
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	56
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425573

Isoline DALI
ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK DA
0042557

PHOTOMETRY

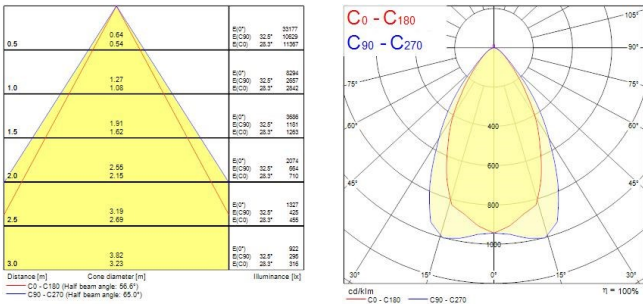

TECHNICAL DRAWINGS

