
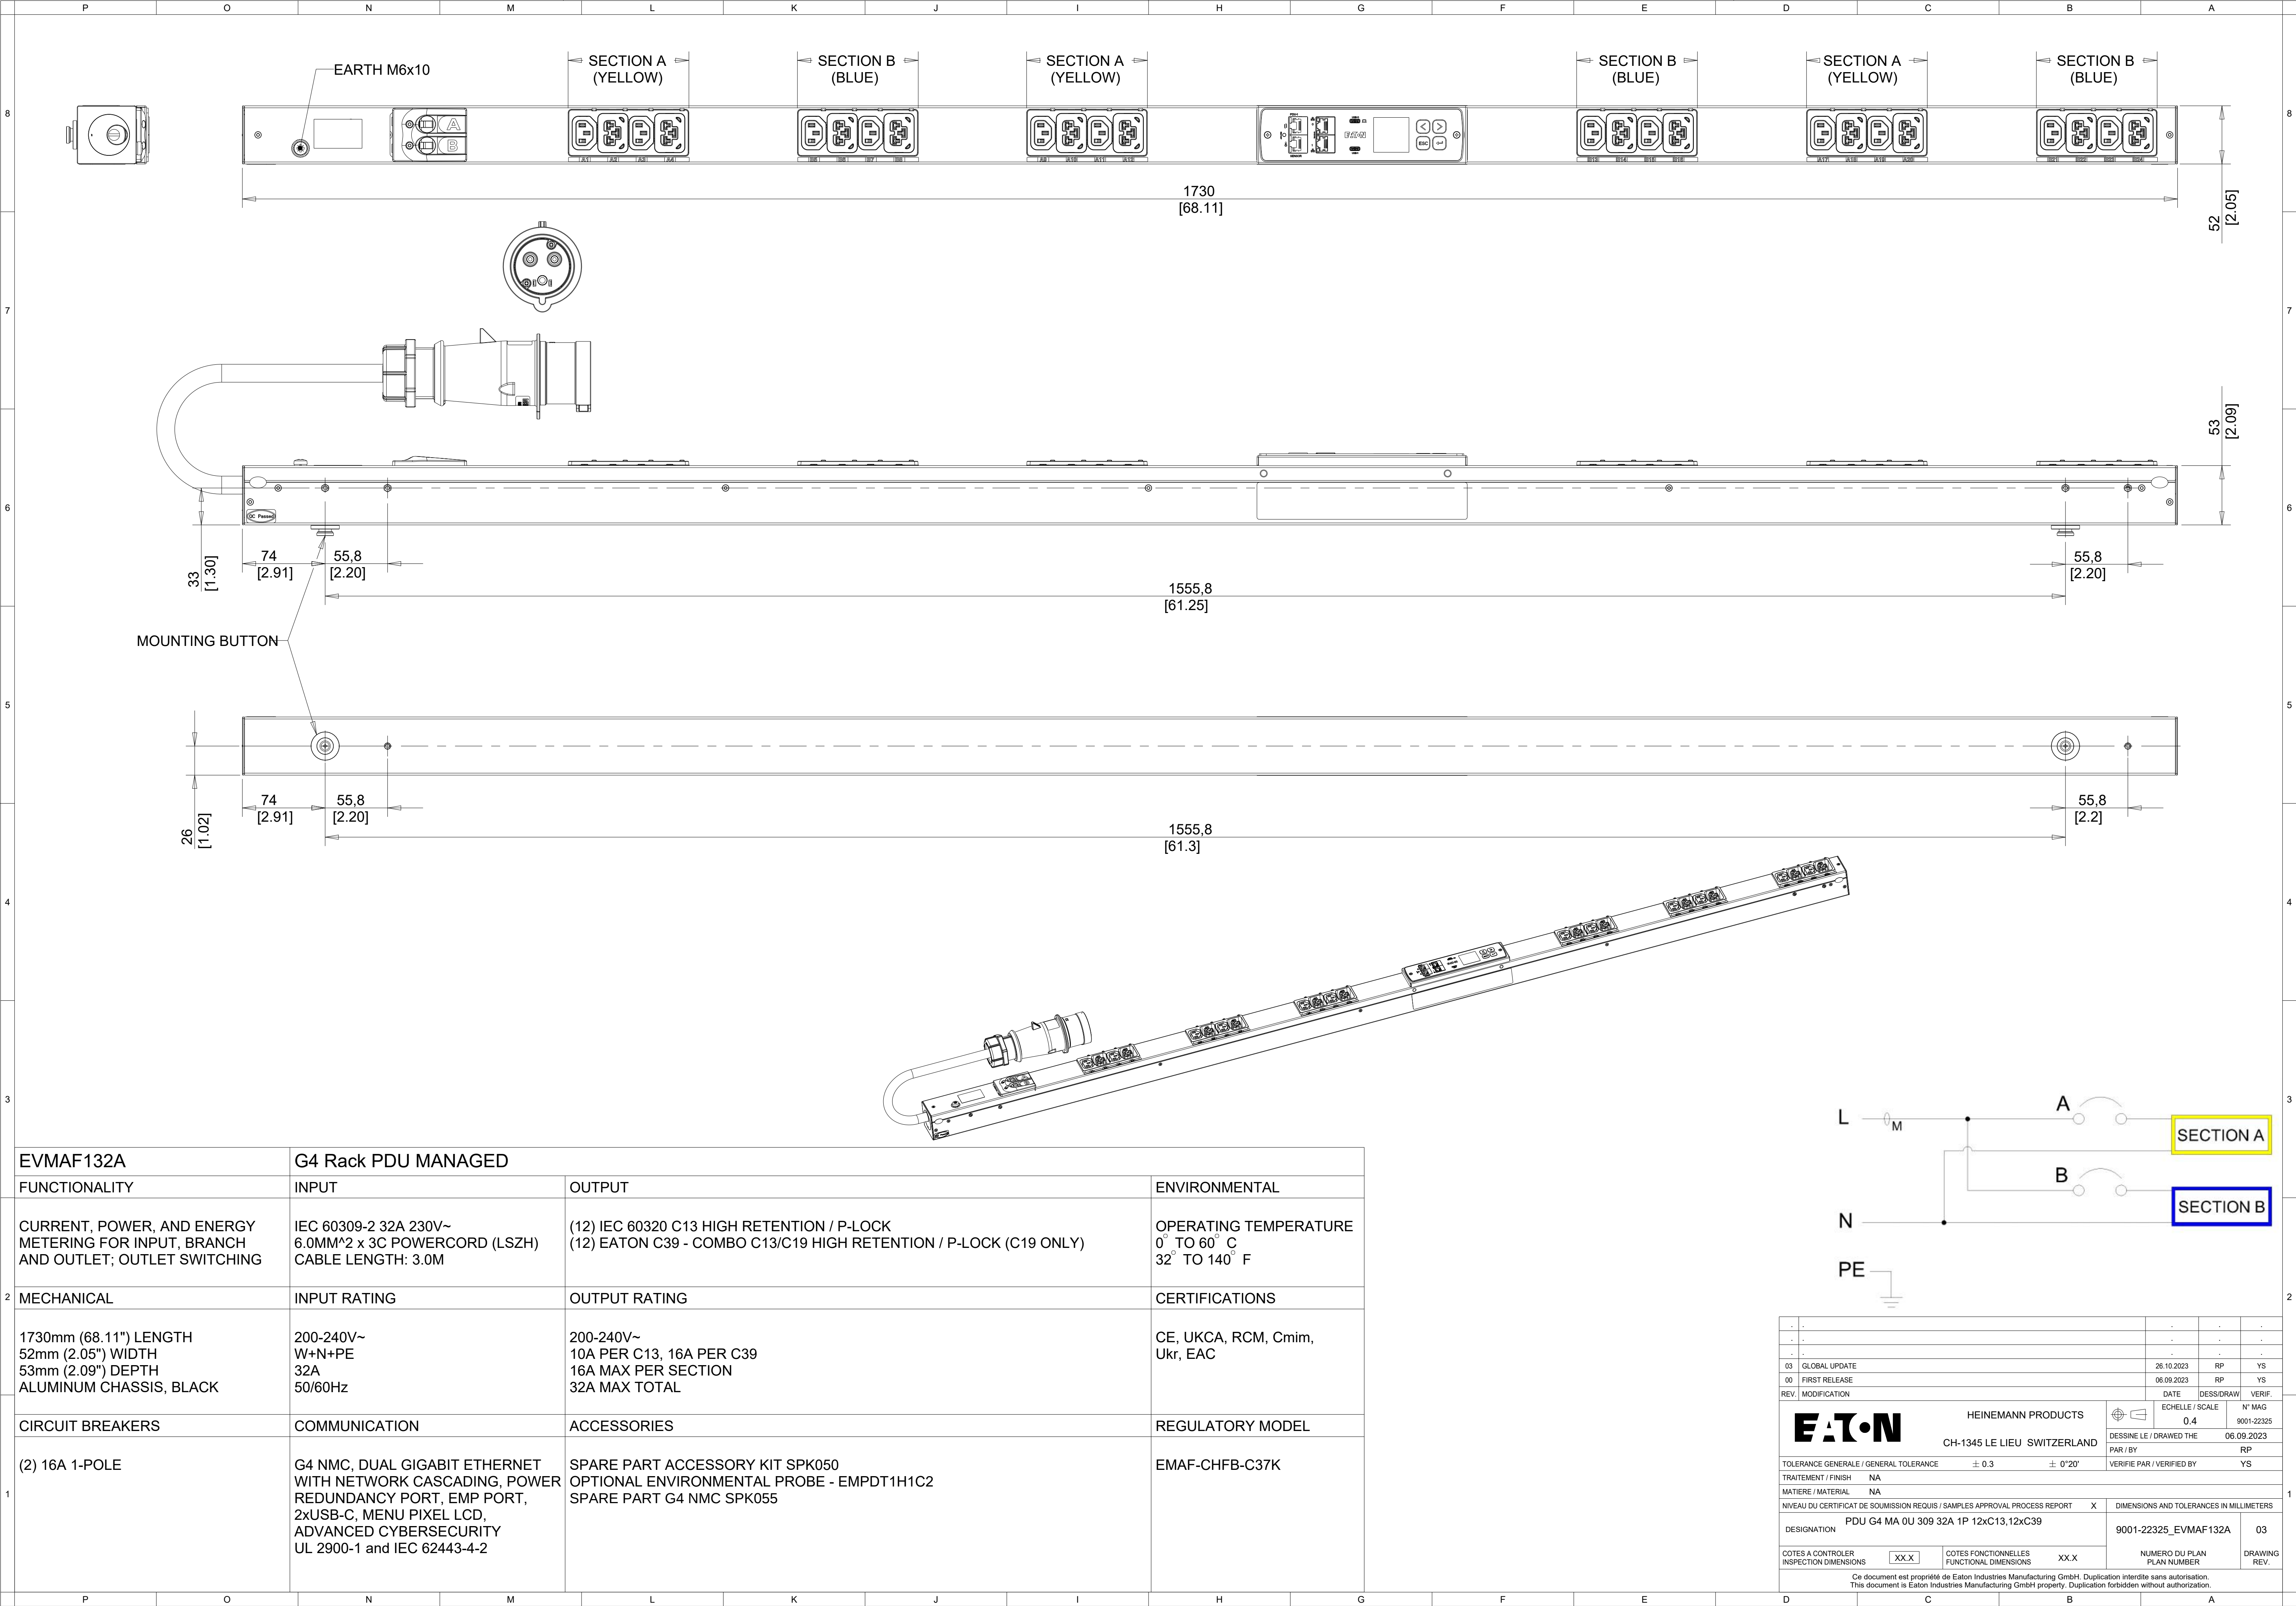




EVMAF132A	G4 Rack PDU MANAGED		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT, POWER, AND ENERGY METERING FOR INPUT, BRANCH AND OUTLET; OUTLET SWITCHING	IEC 60309-2 32A 230V~ 6.0MM^2 x 3C POWERCORD (LSZH) CABLE LENGTH: 3.0M	(12) IEC 60320 C13 HIGH RETENTION / P-LOCK (12) EATON C39 - COMBO C13/C19 HIGH RETENTION / P-LOCK (C19 ONLY)	OPERATING TEMPERATURE 0° TO 60° C 32° TO 140° F
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
1730mm (68.11") LENGTH 52mm (2.05") WIDTH 53mm (2.09") DEPTH ALUMINUM CHASSIS, BLACK	200-240V~ W+N+PE 32A 50/60Hz	200-240V~ 10A PER C13, 16A PER C39 16A MAX PER SECTION 32A MAX TOTAL	CE, UKCA, RCM, Cmim, Ukr, EAC
CIRCUIT BREAKERS	COMMUNICATION	ACCESSORIES	REGULATORY MODEL
(2) 16A 1-POLE	G4 NMC, DUAL GIGABIT ETHERNET WITH NETWORK CASCADING, POWER REDUNDANCY PORT, EMP PORT, 2xUSB-C, MENU PIXEL LCD, ADVANCED CYBERSECURITY UL 2900-1 and IEC 62443-4-2	SPARE PART ACCESSORY KIT SPK050 OPTIONAL ENVIRONMENTAL PROBE - EMPDT1H1C2 SPARE PART G4 NMC SPK055	EMAF-CHFB-C37K

03	GLOBAL UPDATE	26.10.2023		RP	YS				
00	FIRST RELEASE	06.09.2023		RP	YS				
REV.	MODIFICATION	DATE		DESS/DRAW	VERIF.				
				ECHELLE / SCALE 0.4		N° MAG 9001-22325			
CH-1345 LE LIEU SWITZERLAND		DESSINE LE / DRAWED THE		06.09.2023					
		PAR / BY		RP					
TOLERANCE GENERALE / GENERAL TOLERANCE		± 0.3		± 0"20"		VERIFIE PAR / VERIFIED BY		YS	
TRAITEMENT / FINISH		NA							
MATIERE / MATERIAL		NA							
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		X		DIMENSIONS AND TOLERANCES IN MILLIMETERS					
DESIGNATION		PDU G4 MA 0U 309 32A 1P 12xC13,12xC39		9001-22325_EVMAF132A		03			
COTES A CONTROLER INSPECTION DIMENSIONS		XX.X		COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS		XX.X		NUMERO DU PLAN PLAN NUMBER	
								DRAWING REV.	
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.									