


## Ascent 150 II Wallwasher

ASCENT 150 II WW 3600 3K DALI  
2059377

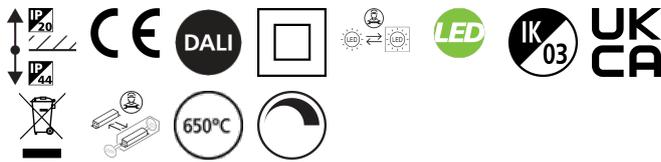

### PRODUCT OVERVIEW

Product name	ASCENT 150 II WW 3600 3K DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
E-number FI	4237892
Warranty	5 years
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	133
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	27
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK03
Product EAN number	5025768593774

### DATA TABLE

#### General data

Product name	ASCENT 150 II WW 3600 3K DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium

## Ascent 150 II Wallwasher

*ASCENT 150 II WW 3600 3K DALI*  
2059377

<b>Mount</b>	Ceiling recessed mounting
<b>Environment</b>	Internal
<b>Operating temperature range (°C)</b>	25°C...+25°C
<b>Performance ambient temperature Tq (°C)</b>	25
<b>E-number FI</b>	4237892
<b>Warranty</b>	5 years

### Optical data

<b>Fixture luminous flux (lm)</b>	3600
<b>Luminaire efficacy (lm/W)</b>	133
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	SDCM3
<b>Colour Consistency (SDCM)</b>	3
<b>Adjustable chromaticity</b>	N
<b>Photobiological Risk Group</b>	RG0

### Electrical data

<b>Total power consumption (W)</b>	27
<b>Primary Supply/Product voltage - min (V)</b>	220
<b>Lamp power factor</b>	1
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic ballast
<b>Drive current (mA)</b>	1000
<b>Inrush Current (A)</b>	25
<b>Inrush Duration (µs)</b>	141
<b>Glow Wire Test (°C)</b>	650
<b>Energy Efficiency Class (A-&gt;G) of contained light source</b>	C
<b>Nominal Frequency (Hz)</b>	50/60/HF
<b>Max. products per 10A C Breaker</b>	31
<b>Max. products per 20A B Breaker</b>	40
<b>Connectable conductor cross section - Min (mm²)</b>	1
<b>Connectable conductor cross section - Max (mm²)</b>	1

### Lifetime data

<b>Lifespan L70 B50</b>	100000
<b>Lifespan L80 B20</b>	100000
<b>Lifespan L90 B10</b>	55000

### Physical data

<b>Housing colour</b>	Aluminium
<b>IP rating</b>	IP44/20
<b>IK rating</b>	IK03
<b>Diffuser finish</b>	Transparent

## Ascent 150 II Wallwasher ASCENT 150 II WW 3600 3K DALI 2059377

Diffuser material	PC Polycarbonate
Nominal Product Width (mm)	248
Nominal Product Diameter (mm)	248
Weight (kg)	1.03
Recessed Depth (mm)	180


### Packaging

Single packaging type	Carton
Product EAN number	5025768593774
Packaging single width (cm)	30.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768593774
Packaging outer length / height (cm)	30.0

### Safety data

Optimal operating condition (°C)	25-25
----------------------------------	-------

## PHOTOMETRY

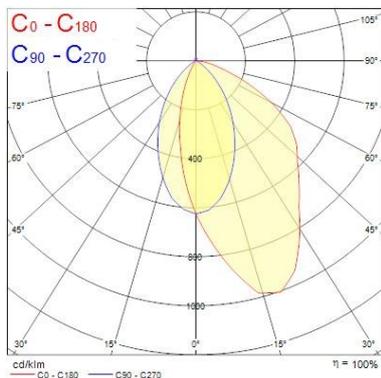

## TECHNICAL DRAWINGS

