


Walraven 2S Clamp (M8/10)

(B0524)

for insulated pipe, steel, cast iron and plastic (multilayer) pipe

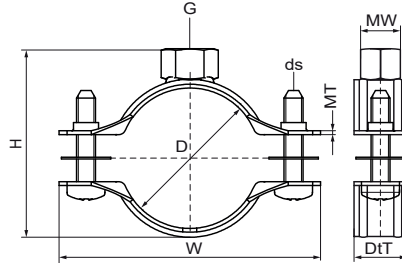

Features & benefits

- gapless range
- anti loss washers prevent screws from falling out during installation
- perfect solution for insulated pipe supports
- material: steel
- zinc plated



EPD

Product Number	NRF Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter		D	D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description		mm		"		mm	mm	mm	mm	mm		N	
33035014	3485486	10 - 14	-	-	M8/M10	35	46	20	20	1.00	M5	700	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035019	3485487	15 - 19	DN 10	3/8	M8/M10	40	51	20	20	1.00	M5	700	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035024	3485488	20 - 24	DN 15	1/2	M8/M10	45	56	20	20	1.00	M5	700	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035030	3485489	25 - 30	DN 20	3/4	M8/M10	51	62	20	20	1.00	M5	700	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035037	3485491	31 - 37	DN 25	1	M8/M10	58	69	20	20	1.00	M5	700	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035046	3485492	38 - 46	DN 32	1 1/4	M8/M10	67	77	20	20	1.25	M5	950	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035052	3485493	47 - 52	DN 40	1 1/2	M8/M10	73	84	20	20	1.25	M5	950	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035061	3485494	53 - 61	DN 50	2	M8/M10	82	93	20	20	1.25	M5	950	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035067	3485495	62 - 67	-	-	M8/M10	88	99	20	20	1.25	M5	950	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035074	3485496	68 - 74	-	-	M8/M10	96	111	20	20	1.50	M6	1,400	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035081	3485497	75 - 81	DN 65	2 1/2	M8/M10	103	118	20	20	1.50	M6	1,400	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035087	3485498	82 - 87	-	-	M8/M10	109	124	20	20	1.50	M6	1,400	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035095	3485499	88 - 95	DN 80	3	M8/M10	119	136	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035103	3485501	96 - 103	-	-	M8/M10	127	143	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035112	3485502	104 - 112	-	-	M8/M10	136	153	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035118	3485503	113 - 118	DN 100	4	M8/M10	142	159	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035127	3485504	119 - 127	-	-	M8/M10	151	168	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035137	3485505	128 - 137	-	-	M8/M10	161	178	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035144	3485506	138 - 144	DN 125	5	M8/M10	168	185	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035153	3485507	145 - 153	-	-	M8/M10	177	194	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035162	3485508	154 - 162	-	-	M8/M10	186	203	23	23	2.00	M6	2,000	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD

Walraven 2S Clamp (M8/10)

(B0524)

for insulated pipe, steel, cast iron and plastic (multilayer) pipe

Product Number	NRF Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter		D	D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description		mm		"		mm	mm	mm	mm	mm		N	
33035172	3485509	163 - 172	DN 150	6	M8/M10	199	217	25	25	2.50	M6	3,300	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035183	3485511	173 - 183	-	-	M8/M10	210	227	25	25	2.50	M6	3,300	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035194	3485512	184 - 194	-	-	M8/M10	221	239	25	25	2.50	M6	3,300	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035205	3485513	195 - 205	-	-	M8/M10	232	249	25	25	2.50	M6	3,300	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035216	3485514	206 - 216	-	-	M8/M10	243	260	25	25	2.50	M6	3,300	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33035225	3485515	217 - 225	DN 200	8	M8/M10	253	271	25	25	2.50	M6	3,300	ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD