

SylBay - SylSmart  
Sylbay 4000K L4 37000LM AISLE SSCS  
0040381



Product features

- Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Twin body with 4 optical modules, 37300 lumens, 268W, 139lm/W, 4000K, CRI 80, aisle beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 726x386x133mm, Mains + control cable of 2 meter. SylSmart Standalone enabled.




PRODUCT OVERVIEW

|                                 |                                    |
|---------------------------------|------------------------------------|
| Product name                    | Sylbay 4000K L4 37000LM AISLE SSCS |
| Technology                      | LED                                |
| Cap/Base                        | N/A                                |
| Housing                         | Aluminium                          |
| Mount                           | Suspended                          |
| Fixture rating                  | Enclosed                           |
| General application             | Logistics & Industry               |
| ETIM Class                      | EC001716                           |
| Warranty                        | 5 years                            |
| Fixture luminous flux (lm)      | 37300                              |
| Luminaire efficacy (lm/W)       | 139                                |
| LOR (%)                         | 100                                |
| Colour temperature (K)          | 4000                               |
| Light colour                    | Neutral White                      |
| CRI (Ra)                        | 80                                 |
| Colour Consistency (SDCM)       | 3                                  |
| Colour Variation Initial (SDCM) | SDCM3                              |
| Beam Angle (°)                  | 30*60                              |
| Glare control                   | < 22                               |
| Photobiological Risk Group      | RG1                                |
| Total power consumption (W)     | 268                                |
| Electrical protection           | Class I                            |
| Control gear type               | Electronic ballast                 |
| Control gear mounting           | Integral                           |
| Dimmable                        | Yes                                |
| Dimming method                  | SylSmart SSC                       |
| Housing colour                  | Grey                               |
| IP rating                       | IP65                               |
| IK rating                       | IK08                               |
| Product EAN number              | 5410288403816                      |

SylBay - SylSmart  
Sylbay 4000K L4 37000LM AISLE SSCS  
0040381

PHOTOMETRY

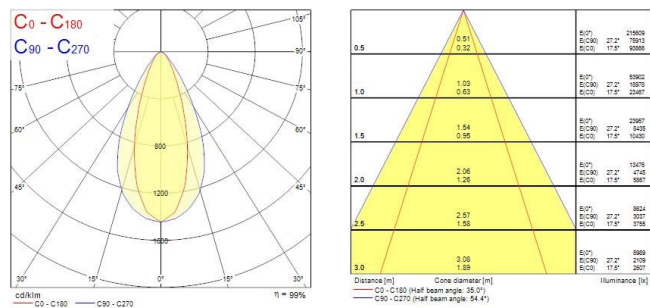

TECHNICAL DRAWINGS

