

Giotto LED 335  
GIOTTO 335 4000K SURFACE DALI  
3034804



Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2350lm, 18.2W, 129lm/W, 4000K, CRI 80, DALI, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.




PRODUCT OVERVIEW

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Product name                    | GIOTTO 335 4000K SURFACE DALI                  |
| Technology                      | LED                                            |
| Cap/Base                        | N/A                                            |
| Housing                         | PC Polycarbonate                               |
| Mount                           | Ceiling surface mounting, Wall surface mounted |
| Environment                     | Indoor                                         |
| General application             | Hospitality, Logistics & Industry              |
| ETIM Class                      | EC002892                                       |
| E-number FI                     | 4270264                                        |
| Warranty                        | 5 years                                        |
| Fixture luminous flux (lm)      | 2350                                           |
| Luminous flux (lm)              | 2350                                           |
| Luminaire efficacy (lm/W)       | 129                                            |
| Colour temperature (K)          | 4000                                           |
| Colour Code                     | 840                                            |
| Light colour                    | Neutral White                                  |
| CRI (Ra)                        | 80                                             |
| Colour Variation Initial (SDCM) | SDCM3                                          |
| Beam Angle (°)                  | 120                                            |
| Glare control                   | < 26                                           |
| Photobiological Risk Group      | RG0                                            |
| Total power consumption (W)     | 18.2                                           |
| Electrical protection           | Class I                                        |
| Control gear type               | LED driver constant current                    |
| Control gear mounting           | Integrated                                     |
| Dimmable                        | Yes                                            |
| Dimming method                  | DALI                                           |
| Minimum dimming level (%)       | 1                                              |
| LED Flickering Rate             | Ultra low (5% or less)                         |
| Housing colour                  | White                                          |
| IP rating                       | IP44                                           |
| IK rating                       | IK10                                           |
| Product EAN number              | 8711971348047                                  |

Giotto LED 335  
GIOTTO 335 4000K SURFACE DALI  
3034804

PHOTOMETRY

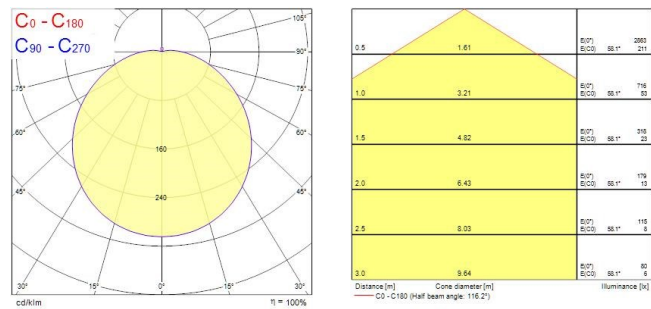

TECHNICAL DRAWINGS

