

# Concord

Solstice 200 4200lm 930 DALI  
2070150



## Features

- The Solstice 200 4200lm 930 DALI is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

## Product Overview


Product name	Solstice 200 4200lm 930 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4262079
Fixture luminous flux (lm)	4200
Luminous flux (lm)	4200
Luminaire efficacy (lm/W)	135
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 21

# Concord

## Solstice 200 4200lm 930 DALI 2070150

Photobiological Risk Group	RG0
Total power consumption (W)	31
Electrical protection	Class II
Control gear type	LED driver constant current
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768701506
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	4200

### Photometry

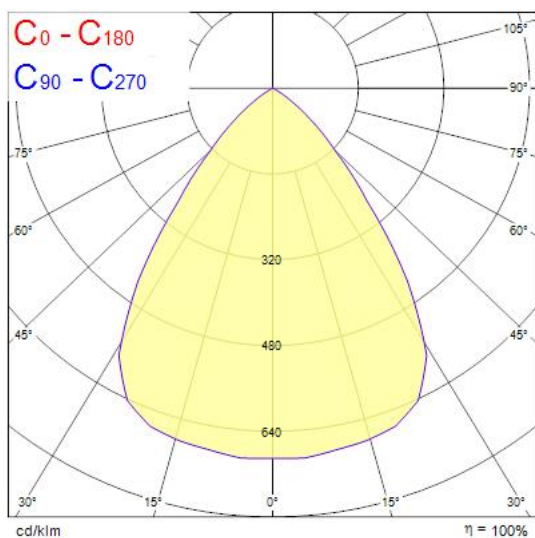

### Technical drawings

