# Technical data sheet

## Screw-in spacer clip, heavy-duty version M8

## Item number: 1387081

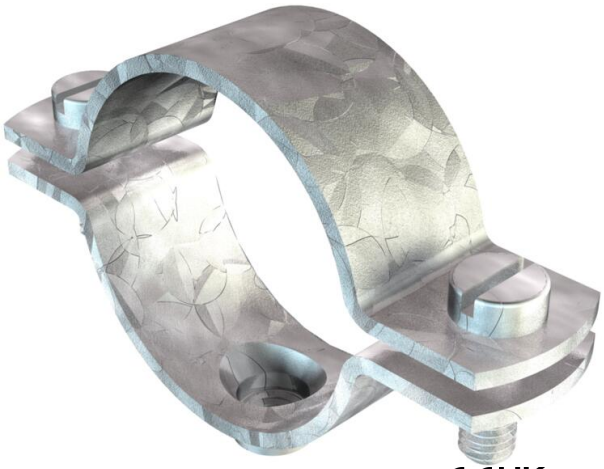

Can be screwed onto M8 thread. Size 27 FT is suitable for M25. Size 42.5 FT is suitable for M40. Size 48.5 FT is suitable for M50. Size 60 FT is suitable for M63.

St Steel

FT Hot-dip galvanised

### Master data

| | |
|---|---|
| Item number | 1387081 |
| Type | 2900WM8 42.5 FT |
| Description 1 | Distance saddle |
| Description 2 | with threaded connection M8 |
| Manufacturer | OBO |
| Dimension | 1 1/4" |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 9 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1717 kg CO2e / 1 Piece |

# Technical data sheet

## Screw-in spacer clip, heavy-duty version M8

## Item number: 1387081

### Dimensions

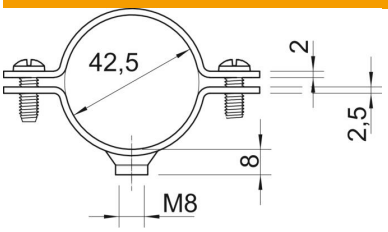





| | |
|---|---|
| Length | 81 mm |
| Width | 20 mm |
| Dimension A | 81 mm |
| Dimension B | 65 mm |
| Dimension D | 42.5 mm |
| Dimension d min. | 42.5 mm |
| Dimension t | 2 mm |
| Dimension t1 (mm) | 2.5 mm |
| Dimension x | 3 mm |

### Technical data

| | |
|---|---|
| Version for | Closed |
| Fastening type | Screw hole |
| For diameter | 42,5 |
| for pipe diameter | M40 |
| Suitable in fire protection area | no |
| Thread | M8 |
| Size | 1 1/4" |
| Halogen-free | no |
| Plastic-covered | no |
| Hole size | M8 |
| Material thickness | 2 mm |
| ROHS-conformant | yes |
| Bolt | M6 x 18 |
| Clamping range D, max. | 42.5 mm |
| Clamping range D, min. | 39.5 mm |
| UV-resistant | yes |