

PIXO ZOOM 1850LM 17D-60D 3CCT DALI BLACK  
0004523



Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Adjustable beam angle between 17° - 60° Die-cast aluminium body, Textured black finishing colour Light color temperature: 3CCT - 2700-3000-4000K, tunable between 2700K and 4000K, changeable by DALI system only System power: 24W, Fixture lumen output: 1850lm, efficacy: 77lm/W (80lm/W @3000K 60D) LED chromacity: 3 step MacAdam ellipse LED source measured at 2700K & 4000K (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.85mmx170mm 5 years warranty


Product Overview

Product name	PIXO ZOOM 1850LM 17D-60D 3CCT DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Office, Retail
ETIM Class	EC001744
E-number FI	4279625
Fixture luminous flux (lm)	1850
Luminaire efficacy (lm/W)	77

PIXO ZOOM 1850LM 17D-60D 3CCT DALI BLACK  
0004523

Light colour	Warm White or Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	4
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9005
IP rating	IP20
IK rating	IK03
Product EAN number	5410288045238
Warranty	5 years
Dimming method	DALI-2
Useful luminous flux (#use)	1850

Photometry

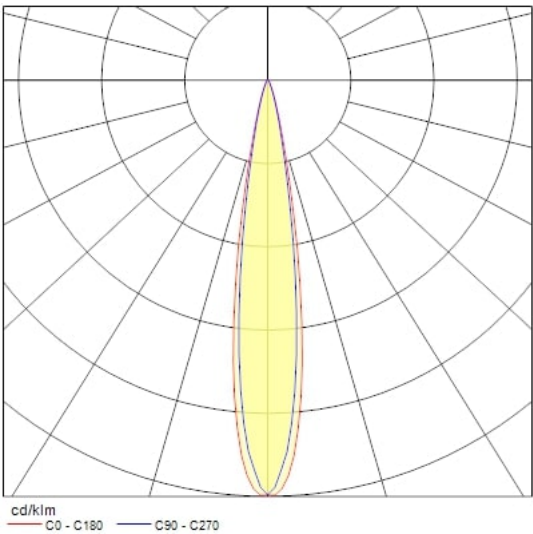

Technical drawings

