


Data Sheet | Item Number: 2092-1635/024-000


Panel feedthrough male connector; clamping collar; 2.5 mm²; 5-pole; Pin spacing 5 mm; light gray

<https://www.wago.com/2092-1635/024-000>

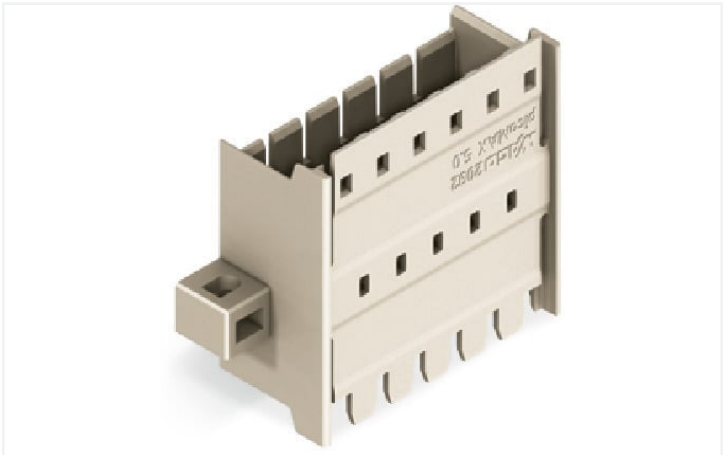

Color: ■ light gray

Similar to illustration

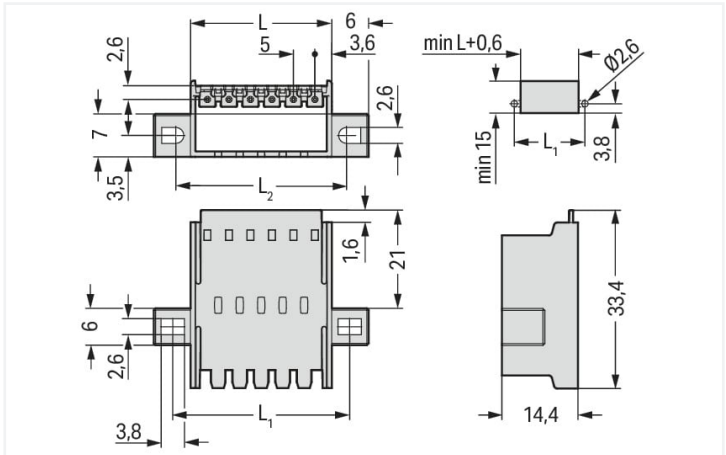


Dimensions in mm

$L = (\text{pole no.} \times \text{pin spacing}) + 2.2 \text{ mm}$

$L1 = (\text{pole no.} \times \text{pin spacing}) + 8 \text{ mm}$

$L2 = (\text{pole no.} \times \text{pin spacing}) + 7 \text{ mm}$

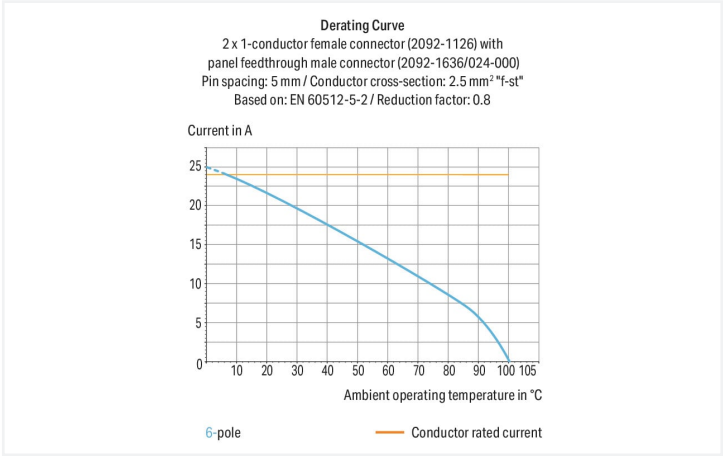

- Male connectors for screw mounting in device or enclosure panels
- External plug-in connection via locking latches to female connectors with conductor terminations
- Internal plug-in connection to female headers with solder pins or female connectors with conductor terminations
- Also available with pre-assembled female connectors on both sides
- Fixing flanges also suitable for panel mounting

Notes			
Safety information		The picoMAX® Pluggable Connection System includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.	

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	250 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Rated current	16 A	16 A	16 A
Approvals per		UL 1059	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	15 A	-	10 A



Connection data		
Total number of potentials	5	Connection 1
Number of connection types	1	
Number of levels	1	
		Pole number 5

Physical data		
Pin spacing	5 mm / 0.197 inches	
Width	39.2 mm / 1.543 inches	
Height	14.4 mm / 0.567 inches	
Depth	33.4 mm / 1.315 inches	

Mechanical data		
Variable coding	No	
Mounting type	Mounting flange Feed-through mounting Panel mounting	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Male connector/plug	
Connector (connection type)	for pluggable connector	
Mismating protection	No	
Plugging without loss of pin spacing	Yes	
Locking of plug-in connection	Locking latch	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	light gray	
Material group	I	
Insulation material	Polyphthalamide (PPA GF)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (E _{Cu})	
Contact plating	Tin	
Fire load	0.104 MJ	
Weight	4.9 g	

Environmental requirements		
Limit temperature range	-60 ... +100 °C	
Processing temperature	-35 ... +60 °C	



Commercial data		
Product Group	26 (picoMAX Connectors)	
eCl@ss 10.0	27-14-11-06	
eCl@ss 9.0	27-14-11-06	
ETIM 8.0	EC001284	
ETIM 7.0	EC001284	
PU (SPU)	50 pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4050821165736	
Customs tariff number	85366930000	

Environmental Product Compliance		
RoHS Compliance Status	Compliant,No Exemption	

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-49737/A1
CSA DEKRA Certification B.V.	C22.2	2362521
CSA DEKRA Certification B.V.	C22.2 No. 158	2362521
cURus Underwriters Laboratories Inc.	UL 1059	E45172
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-102261 REV.2
UL Underwriters Laboratories Inc.	UL 1977	E45171

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2092-1635/024-000	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	↓

CAD/CAE-Data

CAD data
2D/3D Models 2092-1635/024-000




CAE data
EPLAN Data Portal 2092-1635/024-000
ZUKEN Portal 2092-1635/024-000



Installation Notes



"Wire-to-wire" panel feedthrough connection
Notice: Male connectors must not be live when disconnected!



"Wire-to-board" panel feedthrough connection