



Data Sheet | Item Number: 706-100/310-200

Connection cable; 10-pole; Pluggable connector per DIN 41651; open-ended;
Length: 2 m; Conductor cross-section: 0.14 mm²

<https://www.wago.com/706-100/310-200>

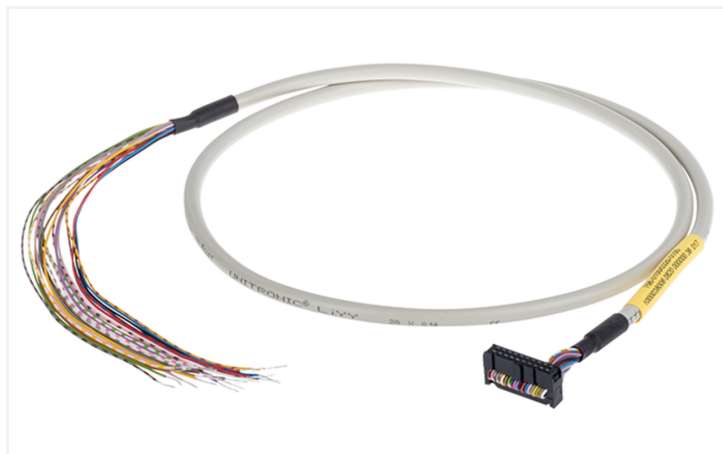

Similar to illustration

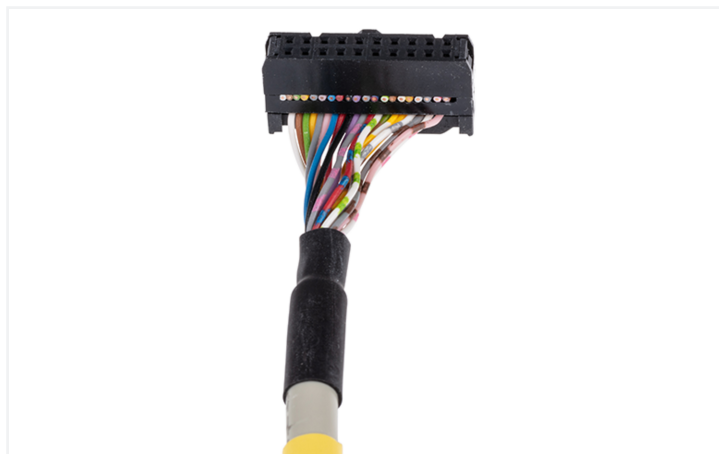

Similar to illustration

Color coding acc. to DIN VDE 47100		10 poles flat connector	
		Pin number	
White		1	
Brown		2	
Green		3	
Yellow		4	
Grey		5	
Pink		6	
Blue		7	
Red		8	
Black		9	
Violet		10	

Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Compatibility

Omron

Omron CJ1W	CJ1W-ID201 CJ1W-OD204
------------	--------------------------

Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	10
Connection type	System
Wire cross-section	0.14 mm ²

Connection 2

Connector	open-ended
Connection type	open-ended
Wire cross-section	0.14 mm ²

Physical data

Cable length	2 m
--------------	-----

Material data

Fire load	0 MJ
Weight	91 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143406536
Customs tariff number	85444290900

Product Classification

UNSPSC	26121629
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-100/310-200

