


## Data Sheet | Item Number: 706-100/310-100

Connection cable; 10-pole; Pluggable connector per DIN 41651; open-ended;  
Length: 1 m; Conductor cross-section: 0.14 mm<sup>2</sup>

<https://www.wago.com/706-100/310-100>



Similar to illustration

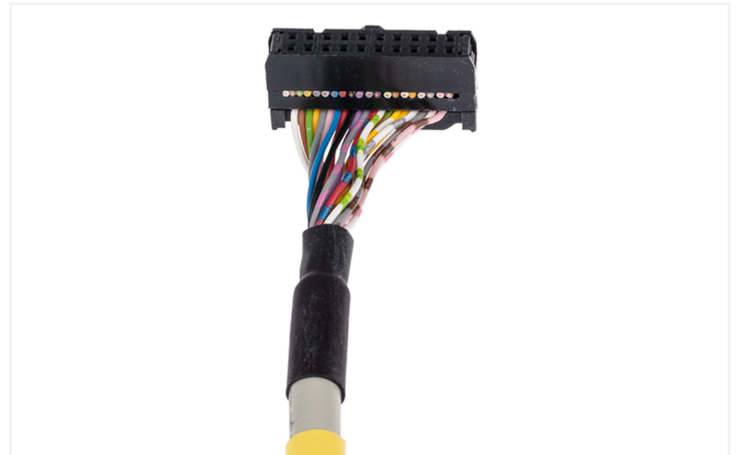

Similar to illustration

Color coding acc. to DIN VDE 47100		10 poles flat connector	
		Pin number	
White		1	
Brown		2	
Green		3	
Yellow		4	
Grey		5	
Pink		6	
Blue		7	
Red		8	
Black		9	
Violet		10	

### Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

### Electrical data

Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

### Compatibility

#### Omron

Omron CJ1W	CJ1W-ID201 CJ1W-OD204
------------	--------------------------

### Connection Data

Cable type	LiYY
Color code	per DIN VDE 47100

### Connection 1

Pluggable connector	Pluggable connector per DIN 41651; female connector
Pole number 1	10
Connection type	System
Wire cross-section	0.14 mm <sup>2</sup>

### Connection 2

Connector	open-ended
Connection type	open-ended
Wire cross-section	0.14 mm <sup>2</sup>

### Physical data

Cable length	1 m
--------------	-----

### Material data

Fire load	0 MJ
Weight	60 g

### Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

### Commercial data

PU (SPU)	1 pcs
Packaging type	not specified
Country of origin	FR
GTIN	4050821777649
Customs tariff number	85444290900

### Product Classification

UNSPSC	26121629
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product  
Compliance  
706-100/310-100

