


Walraven W-LX-N Concrete Screw

(L0359)

unibody zinc-plated concrete screw with an internal M8/M10 thread

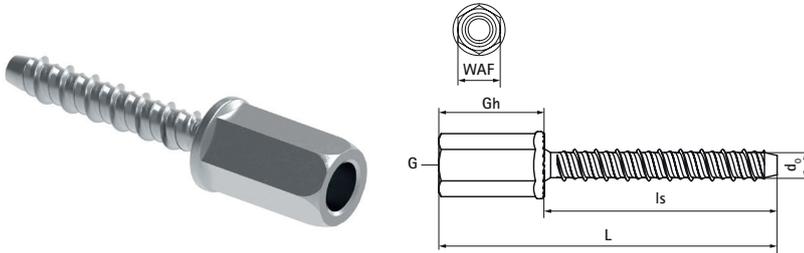

Features & benefits

- very high load capacity
- approved for use in precast prestressed hollow core slabs
- up to 3 anchoring depths provide maximum installation flexibility
- reduced edge and anchor spacing distances
- removable
- unique tip and thread geometry prevents concrete spalling
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001:2024-01 (08) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheet and/or the ETA report
- material: steel
- zinc plated

Product Number	Connection Thread	Connection Height	Screw Length	Anchor Size	Width Across Flats	Drill Hole Diameter	Total Width x Total Height x Total Length
<i>Reference letter</i>	G	Gh	Is		WAF	d0	W x H x L
<i>Unit description</i>		mm	mm		mm	mm	mm x mm x mm
62433304	M8/M10	23	35	6	13	6	16 x 16 x 60
62433305	M8/M10	23	55	6	13	6	16 x 16 x 80
62433314	M8	15	35	6	13	6	16 x 16 x 60
62433315	M8	15	55	6	13	6	16 x 16 x 80
62433324	M10	15	35	6	13	6	16 x 16 x 60
62433325	M10	15	55	6	13	6	16 x 16 x 80