


Walraven W-LX-P Concrete Screw

(L0356)

zinc-plated concrete screw with a $\varnothing 14.6$ mm pan head and torx T30 drive

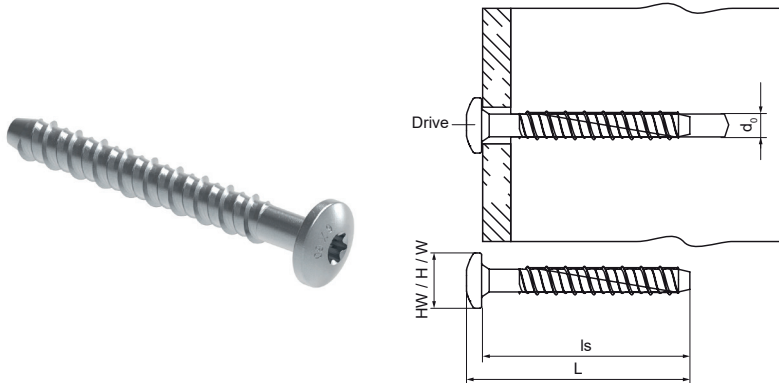

Features & benefits

- very high load capacity
- approved for use in precast prestressed hollow core slabs
- up to 3 anchoring depths provide maximum installation and design flexibility
- reduced edge and anchor spacing distances
- removable
- unique tip and thread geometry prevents concrete spalling
- material: steel
- zinc plated
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001:2014-04 (05) and VdS CEA 4001:2018-01 (06) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheets and/or the ETA reports

Product Number	Screw Length	Anchor Size	Key Driver Size	Drill Hole Diameter	Head Width	Total Width x Total Height x Total Length
Reference letter	ls		Drive	d0	HW	W x H x L
Unit description	mm			mm	mm	mm x mm x mm
62431304	40	6	T30	6	14.6	15 x 15 x 44
62431306	60	6	T30	6	14.6	14.6 x 14.6 x 64