


## Resisto Standard Efficacy

Resisto 600 IP66 2500lm 865  
0010205



### Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2500lm; 19W; 132lm/W; 6500K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 650mm x 89mm x 88mm; D-mark.

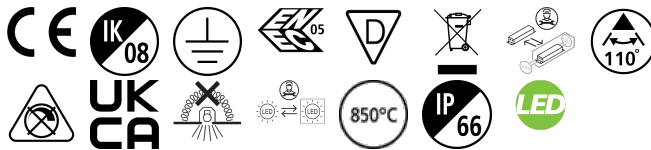


### PRODUCT OVERVIEW

|                                   |                                                           |
|-----------------------------------|-----------------------------------------------------------|
| Product name                      | Resisto 600 IP66 2500lm 865                               |
| Technology                        | LED                                                       |
| Cap/Base                          | N/A                                                       |
| Housing                           | PC Polycarbonate                                          |
| Mount                             | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application               | Logistics & Industry                                      |
| ETIM Class                        | EC002892                                                  |
| E-number FI                       | 4357039                                                   |
| Warranty                          | 5 years                                                   |
| Useful luminous flux (Fuse)       | 2500                                                      |
| Fixture luminous flux (lm)        | 2500                                                      |
| Luminaire efficacy (lm/W)         | 132                                                       |
| Correlated colour temperature (k) | 6500                                                      |
| CRI (Ra)                          | 80                                                        |
| Colour Variation Initial (SDCM)   | SDCM5                                                     |
| Colour Consistency (SDCM)         | 5                                                         |
| Beam Angle (°)                    | 110                                                       |
| Glare control                     | < 24                                                      |
| Photobiological Risk Group        | RG1                                                       |
| Total power consumption (W)       | 19                                                        |
| Electrical protection             | Class I                                                   |
| Control gear type                 | LED driver constant current                               |
| Dimmable                          | No                                                        |
| Dimming method                    | N/A                                                       |
| LED Flickering Rate               | Ultra low (5% or less)                                    |
| Housing colour                    | Grey                                                      |
| IP rating                         | IP66                                                      |
| IK rating                         | IK08                                                      |
| Product EAN number                | 5410288102054                                             |

### PHOTOMETRY

Resisto Standard Efficacy  
Resisto 600 IP66 2500lm 865  
0010205

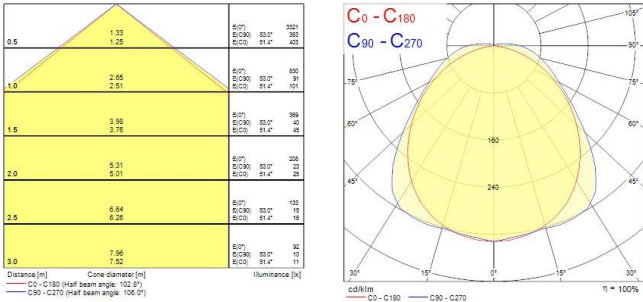

TECHNICAL DRAWINGS

