

AREUM WALL 600 D/I 4000K DALI ALU
0042981



Features

• AREUM WALL 600 D/I 4000K ALU DALI is a highly efficient wall mounted LED luminaire with 40% direct and 60% indirect light distribution. 28mm high aluminium body with rounded edges. Length 600mm, width 200mm. White aluminium RAL9006 powder coated luminaire body and powder coated steel wall mounted gearbox. Low flicker (<5%) DALI dimmable driver. Luminous flux: 5850lm, Power consumption: 45W. Luminaire efficacy: 130lm/W. CRI (Ra)>80 4000K (Neutral White) LED, chromaticity tolerance: SDCM<3. Lifespan: L80B10 100,000h. UGR<16, Luminance at 65°<3000 cd/m2. Photobiological safety risk group 0. Electrical protection: Class I. Glow Wire Test 650°C.


Product Overview

Product name	AREUM WALL 600 D/I 4000K DALI ALU
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Wall surface mounted
General application	Office
ETIM Class	EC002892
E-number FI	4279373
Fixture luminous flux (lm)	5850
Luminaire efficacy (lm/W)	130
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	360
Glare control	< 19

AREUM WALL 600 D/I 4000K DALI ALU
0042981

Photobiological Risk Group	RG0
Total power consumption (W)	45
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9006
IP rating	IP20
IK rating	IK03
Product EAN number	5410288429816
Warranty	5 years
Dimming method	DALI-2

Photometry

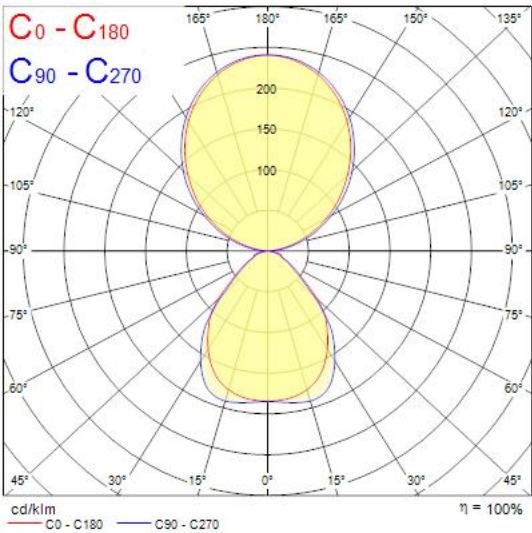

Technical drawings

