

Features

• Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack UGR19 lenses, light beam angle:60° Textured black finishing colour. Light color temperature: 4000K, neutral white, Total system power: 23W, Fixture lumen output: 1900lm, efficacy: 83lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, DALI dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. COMPATIBLE WITH OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.1426mmx32mmx75mm


Product Overview

Product name	RAXA UGR19 1500 CRI90 4000K DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	83
Correlated colour temperature (k)	4000
Light colour	Neutral White

RAXA UGR19 1500 CRI90 4000K DALI BLACK 2016476

CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768164769
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	1900

Photometry

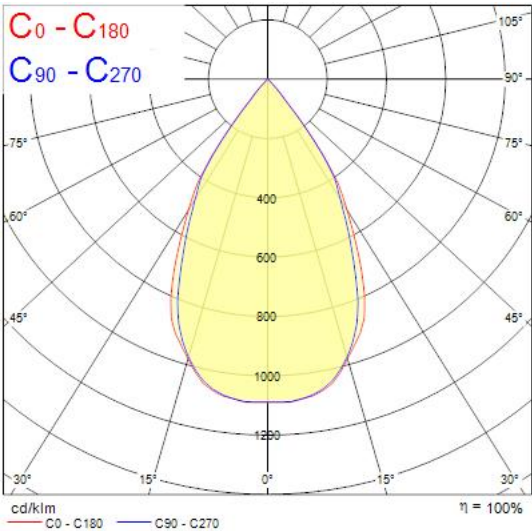

Technical drawings

