

START Flex Low Output
START Flex IP65 840 2750lm
0068128



PRODUCT OVERVIEW

Product name	START Flex IP65 840 2750lm
Technology	LED
Mount	Other
E-number FI	4276598
Warranty	5 years
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class III
Housing colour	Beige
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681283

DATA TABLE

General data	
Product name	START Flex IP65 840 2750lm
Technology	LED
Mount	Other
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4276598
Warranty	5 years
Optical data	
Fixture luminous flux (lm)	2750

START Flex Low Output
START Flex IP65 840 2750lm
0068128

Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	N/A
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	24
Electrical protection	Class III
Drive current (mA)	1000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

Physical data

Housing colour	Beige
IP rating	IP65
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	10
Weight (kg)	0.3

Packaging




Single packaging type	Carton
Product EAN number	5410288681283
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681280
Packaging outer length / height (cm)	49.0

Safety data


Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

START Flex Low Output
START Flex IP65 840 2750lm
0068128

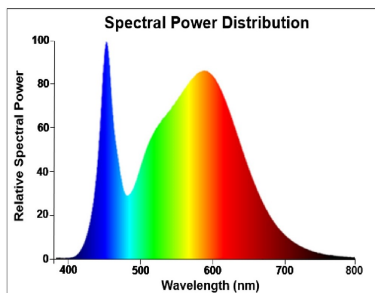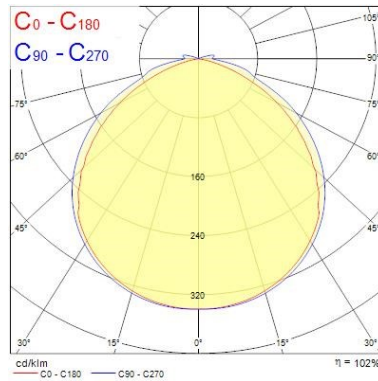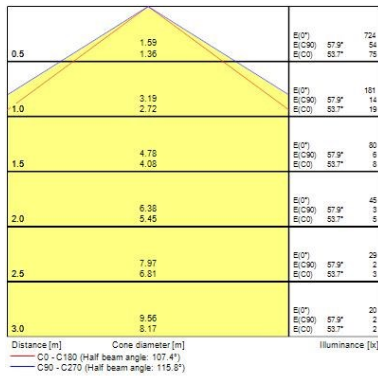

TECHNICAL DRAWINGS




START Flex Low Output
START Flex IP65 840 2750lm
0068128



ENERGY
SYLVANIA

0068128

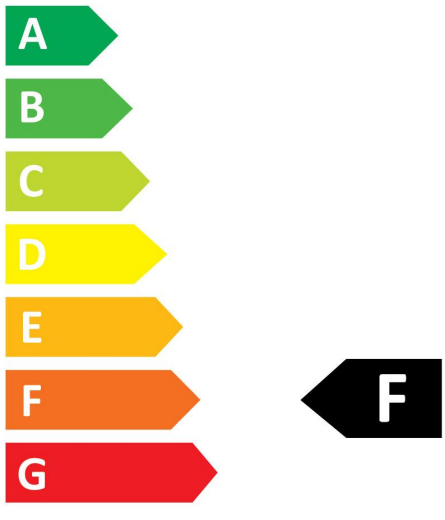


24
kWh/1000h



START Flex Low Output
START Flex IP65 840 2750lm
0068128

**ENERG**
SYLVANIA
0068128

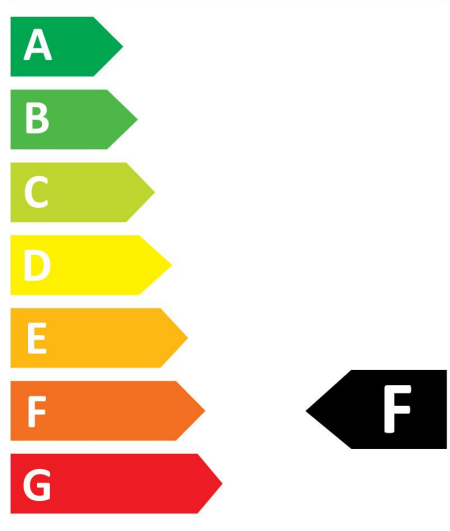

24
kWh/1000h

