




Features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2750lm per 5m (550lm per 1m); 24V; 4000K; CRI80; SDCM ≤3;Compatible with emergency packs: 0046600, 0046601


Product Overview

|                                 |                            |
|---------------------------------|----------------------------|
| Product name                    | START Flex IP65 840 2750lm |
| Technology                      | LED                        |
| Mount                           | Other                      |
| E-number FI                     | 4276598                    |
| Fixture luminous flux (lm)      | 2750                       |
| Luminaire efficacy (lm/W)       | 115                        |
| Colour temperature (K)          | 4000                       |
| CRI (Ra)                        | 80                         |
| Colour Variation Initial (SDCM) | 3                          |
| Beam Angle (°)                  | N/A                        |
| Photobiological Risk Group      | RG1                        |
| Total power consumption (W)     | 24                         |
| Electrical protection           | Class III                  |
| Housing colour                  | Beige                      |
| IP rating                       | IP65                       |
| IK rating                       | IK00                       |
| Product EAN number              | 5410288681283              |
| Warranty                        | 5 years                    |

Photometry

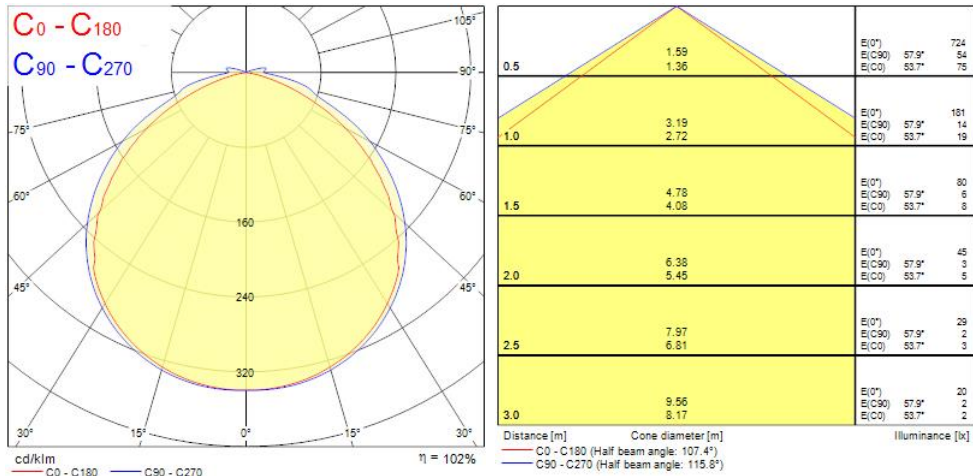

Technical drawings

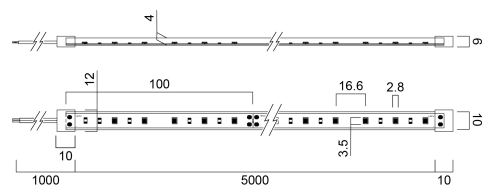

Data table

GENERAL DATA

|                                         |                            |
|-----------------------------------------|----------------------------|
| Product name                            | START Flex IP65 840 2750lm |
| Technology                              | LED                        |
| Mount                                   | Other                      |
| Operating temperature range (°C)        | -20°C...+40°C              |
| Performance ambient temperature Tq (°C) | 25                         |



START Flex IP65 840 2750lm  
0068128

|             |         |
|-------------|---------|
| E-number FI | 4276598 |
| Warranty    | 5 years |

OPTICAL DATA

|                                 |      |
|---------------------------------|------|
| Fixture luminous flux (lm)      | 2750 |
| Luminaire efficacy (lm/W)       | 115  |
| Colour temperature (K)          | 4000 |
| CRI (Ra)                        | 80   |
| Colour Variation Initial (SDCM) | 3    |
| Beam Angle (°)                  | N/A  |
| Photobiological Risk Group      | RG1  |

ELECTRICAL DATA

|                             |           |
|-----------------------------|-----------|
| Total power consumption (W) | 24        |
| Electrical protection       | Class III |
| Control gear required       | No        |
| Drive current (mA)          | 1000      |
| Glow Wire Test (°C)         | 650       |
| Lamp Energy Label (class)   | F         |

LIFETIME DATA

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 54000 |
| Lifespan L70 B10 | 54000 |
| Lifespan L80 B10 | 50000 |
| Lifespan L90 B10 | 44000 |

PHYSICAL DATA

|                             |       |
|-----------------------------|-------|
| Housing colour              | Beige |
| IP rating                   | IP65  |
| IK rating                   | IK00  |
| Nominal Product Length (mm) | 5000  |
| Nominal Product Width (mm)  | 10    |
| Weight (kg)                 | 0.3   |



START Flex IP65 840 2750lm  
0068128

PACKAGING

|                                      |                |
|--------------------------------------|----------------|
| Single packaging type                | Carton         |
| Product EAN number                   | 5410288681283  |
| Packaging single width (cm)          | 22.5           |
| Packaging single depth (cm)          | 3.0            |
| DUN14 (outer)                        | 15410288681280 |
| Packaging outer length / height (cm) | 49.0           |

SAFETY DATA

|                                     |        |
|-------------------------------------|--------|
| Optimal operating condition (°C)    | -20-40 |
| Special purpose lamp                | No     |
| Dry applications use only           | No     |
| Suitable for household illumination | No     |

Energy label



0068128



24  
kWh/1000h



2019/2015



0068128



24  
kWh/1000h



2019/2015