

### Features

• Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack Wallwasher diffuser, asymmetric light beam angle:48° x 83° Textured white finishing colour. Light color temperature: 3000K, warm white, Total system power: 29W, Fixture lumen output: 2850lm, efficacy: 98lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, non-dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. COMPATIBLE WITH OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.1146mmx32mmx75mm


### Product Overview

|                                   |  |
|-----------------------------------|--|
| Product name                      | RAXA WALLWASHER 1200 CRI90 3000K WHITE |
| Technology                        | LED                                    |
| Cap/Base                          | N/A                                    |
| Housing                           | Aluminium                              |
| Mount                             | Track mounting                         |
| General application               | Museums & Galleries, Office, Retail    |
| ETIM Class                        | EC001744                               |
| Fixture luminous flux (lm)        | 2850                                   |
| Luminaire efficacy (lm/W)         | 98                                     |
| Correlated colour temperature (k) | 3000                                   |
| Light colour                      | Warm White                             |

## RAXA WALLWASHER 1200 CRI90 3000K WHITE 2016441

|                                 |                             |
|---------------------------------|-----------------------------|
| CRI (Ra)                        | 90                          |
| Colour Variation Initial (SDCM) | 3                           |
| Beam Angle (°)                  | 48x83                       |
| Glare control                   | < 24                        |
| Photobiological Risk Group      | RG0                         |
| Total power consumption (W)     | 29                          |
| Electrical protection           | Class I                     |
| Control gear type               | LED driver constant current |
| Dimmable                        | No                          |
| Housing colour                  | White                       |
| IP rating                       | IP20                        |
| IK rating                       | IK02                        |
| Product EAN number              | 5025768164417               |
| Warranty                        | 5 years                     |
| Dimming method                  | N/A                         |
| Useful luminous flux (#use)     | 2850                        |

### Photometry

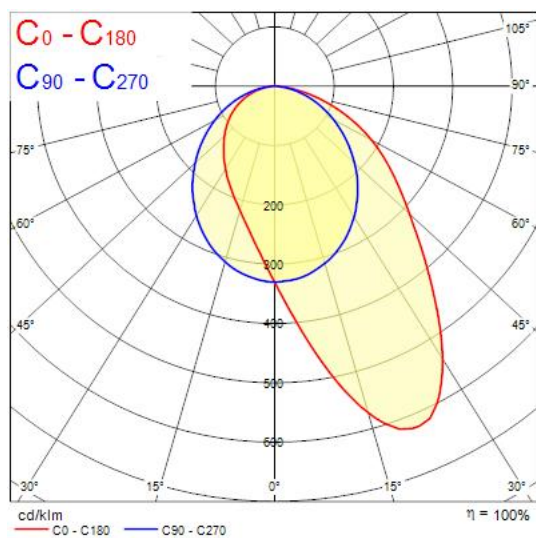

### Technical drawings

