


Concord

Solstice 200 2100lm 940 DALI Sandblast 2070417

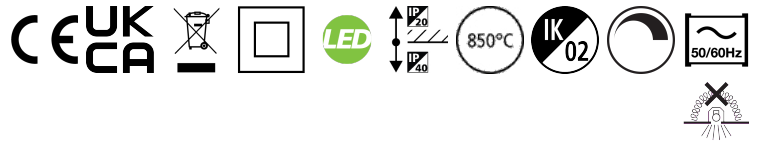

Features

- Solstice 200 2100lm 940 DALI Sandblast is an efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

Product Overview


Product name	Solstice 200 2100lm 940 DALI Sandblast
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4170378
Fixture luminous flux (lm)	2100
Luminous flux (lm)	2100
Luminaire efficacy (lm/W)	141
LOR (%)	124
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

Concord

Solstice 200 2100lm 940 DALI Sandblast 2070417

Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768704170
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	2100

Photometry

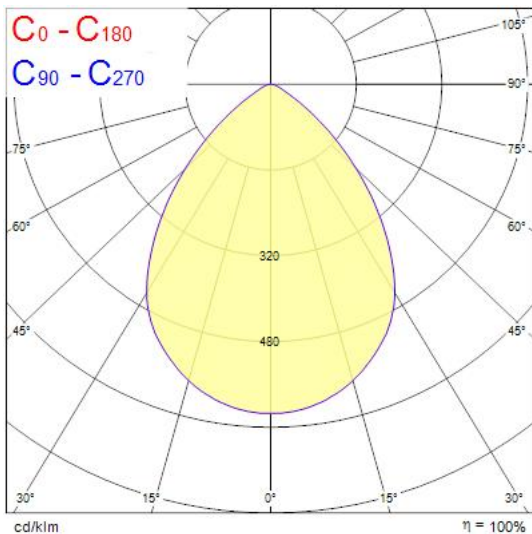

Technical drawings

