


# Concord

## Solstice 150 1600lm 940 DALI Sandblast 2070415

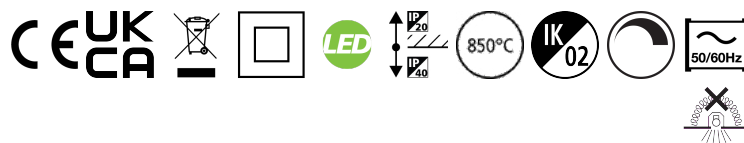

### Features

- Solstice 150 1600lm 940 DALI Sandblast is an efficient DALI dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 150mm.

### Product Overview


Product name	Solstice 150 1600lm 940 DALI Sandblast
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4170376
Fixture luminous flux (lm)	1600
Luminous flux (lm)	1600
Luminaire efficacy (lm/W)	133
LOR (%)	107
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19

# Concord

## Solstice 150 1600lm 940 DALI Sandblast 2070415

Photobiological Risk Group	RG1
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768704156
Warranty	5 years
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Useful luminous flux (#use)	1600

### Photometry

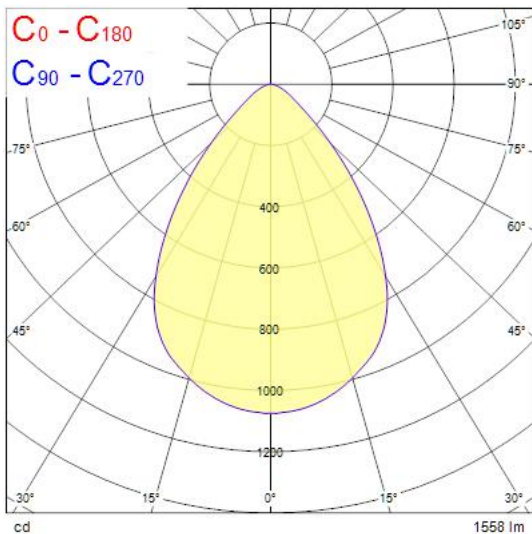

### Technical drawings

