


Flex Pro Low Output
Flex Pro IP20 2500lm 940
0068169

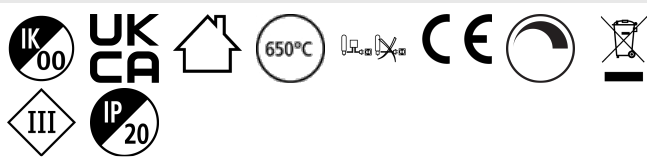

PRODUCT OVERVIEW

Product name	Flex Pro IP20 2500lm 940
Technology	LED
E-number FI	4278332
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	104
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class III
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681696

DATA TABLE

General data	
Product name	Flex Pro IP20 2500lm 940
Technology	LED
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4278332
Warranty	5 years
Optical data	
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	104
Colour temperature (K)	4000
Light colour	Neutral White

Flex Pro Low Output

Flex Pro IP20 2500lm 940
0068169

CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	24
Electrical protection	Class III
Drive current (mA)	1000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	54000
------------------	-------

Physical data

IP rating	IP20
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	8
Weight (kg)	0.1



Packaging

Single packaging type	Carton
Product EAN number	5410288681696
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681693
Packaging outer length / height (cm)	49.0


Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------


PHOTOMETRY

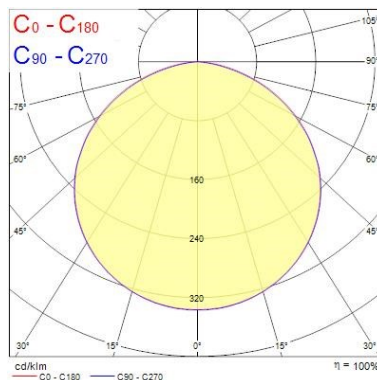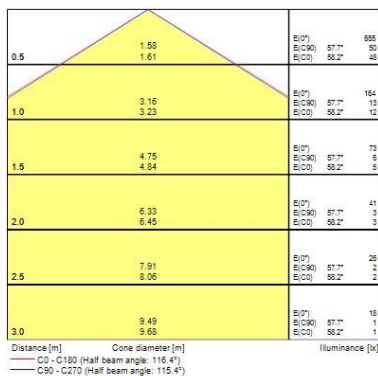

Flex Pro Low Output
Flex Pro IP20 2500lm 940
0068169

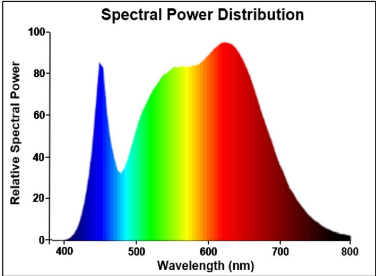

TECHNICAL DRAWINGS



Flex Pro Low Output
Flex Pro IP20 2500lm 940
0068169



ENERGY
SYLVANIA

0068169




24
kWh/1000h



2019/2015

Flex Pro Low Output
Flex Pro IP20 2500lm 940
0068169

**ENERG**
SYLVANIA
0068169

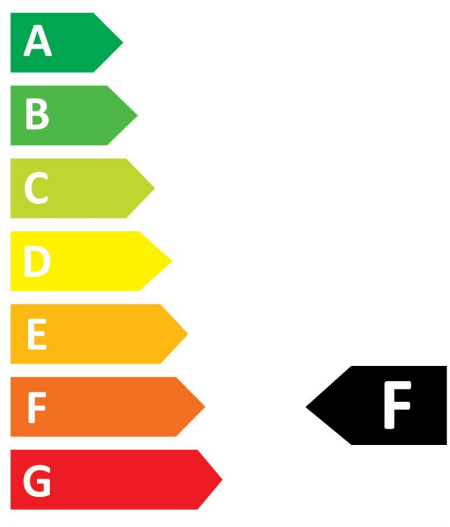

24
kWh/1000h

