

Flex Pro Medium Output
Flex Pro IP20 4750lm 930
0068176



PRODUCT OVERVIEW

Product name	Flex Pro IP20 4750lm 930
Technology	LED
E-number FI	4278333
Warranty	5 years
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	99
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class III
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681764

DATA TABLE

General data	
Product name	Flex Pro IP20 4750lm 930
Technology	LED
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4278333
Warranty	5 years
Optical data	
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	99
Colour temperature (K)	3000
Light colour	Warm White

Flex Pro Medium Output

Flex Pro IP20 4750lm 930
0068176

CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	48
Electrical protection	Class III
Drive current (mA)	2000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	N/A

Lifetime data

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

Physical data

IP rating	IP20
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	10
Weight (kg)	0.2

Packaging



Single packaging type	Carton
Product EAN number	5410288681764
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681761
Packaging outer length / height (cm)	49.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY


Flex Pro Medium Output
Flex Pro IP20 4750lm 930
0068176

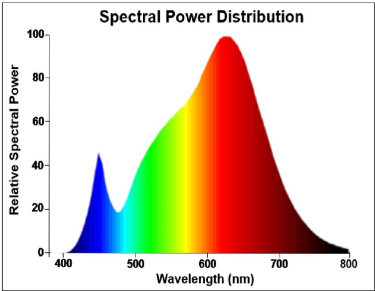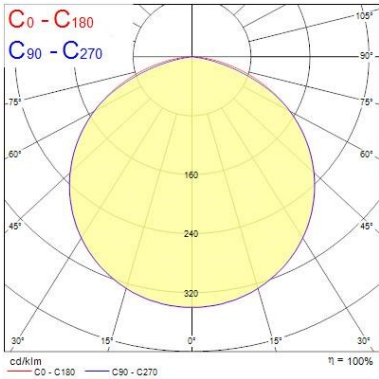

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(7°) E(C0)
0.5	1.58	1304	100
1.0	3.16	326	25
1.5	4.75	148	11
2.0	6.33	81	6
2.5	7.91	52	4
3.0	9.49	36	3

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 115.4°)
Illuminance [lx]

TECHNICAL DRAWINGS




Flex Pro Medium Output
Flex Pro IP20 4750lm 930
0068176

**ENERG**

SYLVANIA

0068176

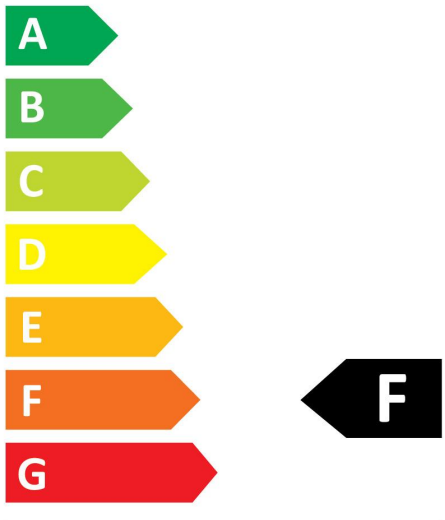


48
kWh/1000h



Flex Pro Medium Output
Flex Pro IP20 4750lm 930
0068176



0068176

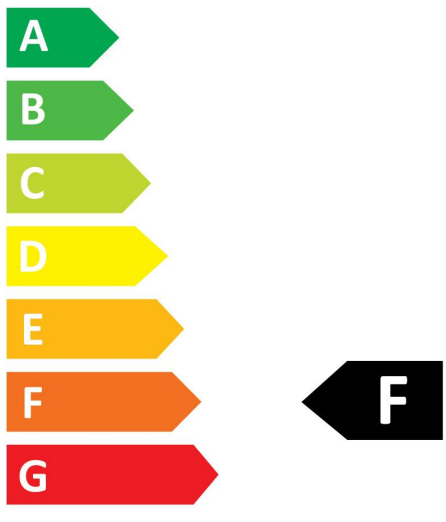

48
kWh/1000h



2019/2015